

## 4.5 V to 60 V Input, 6 A Synchronous Buck Regulator

### DESCRIPTION

The SiC462 is a synchronous buck regulator with integrated high-side and low-side power MOSFETs. Its power stage is capable of supplying 6 A continuous current at up to 1 MHz switching frequency. This regulator produces an adjustable output voltage down to 0.8 V from 4.5 V to 60 V input rail to accommodate a variety of applications, including computing, consumer electronics, telecom, and industrial.

SiC462's architecture delivers ultra-fast transient response with minimum output capacitance and tight ripple regulation at very light load. The device is stable with any capacitor and no external ESR network is required for loop stability. The device also incorporates a power saving scheme that significantly increases light load efficiency.

The regulator integrates a full protection feature set, including output overvoltage protection (OVP), output undervoltage protection (UVP) and thermal shutdown (OTP). It also has UVLO for input rail and a user programmable soft start.

The SiC462 is available in lead (Pb)-free power enhanced MLP55-27L package.

### FEATURES

- Single supply operation from 4.5 V to 60 V input voltage
- Adjustable output voltage down to 0.8 V
- 6 A continuous output current
- Selectable switching frequency from 100 kHz to 1 MHz with an external resistor
- 95 % peak efficiency
- Ultra-fast transient response
- Optional power saving mode
- < 10  $\mu$ A shutdown current
- < 250  $\mu$ A operating current when enabled but not switching
- Cycle-by-cycle current limit
- Output overvoltage protection
- Output undervoltage protection
- Output voltage tracking and sequencing
- -40 °C to +125 °C operating junction temperature

### APPLICATIONS

- POLs for telecom
- Industrial and automation
- Industrial computing
- Consumer electronics

### TYPICAL APPLICATION CIRCUIT AND PACKAGE OPTIONS

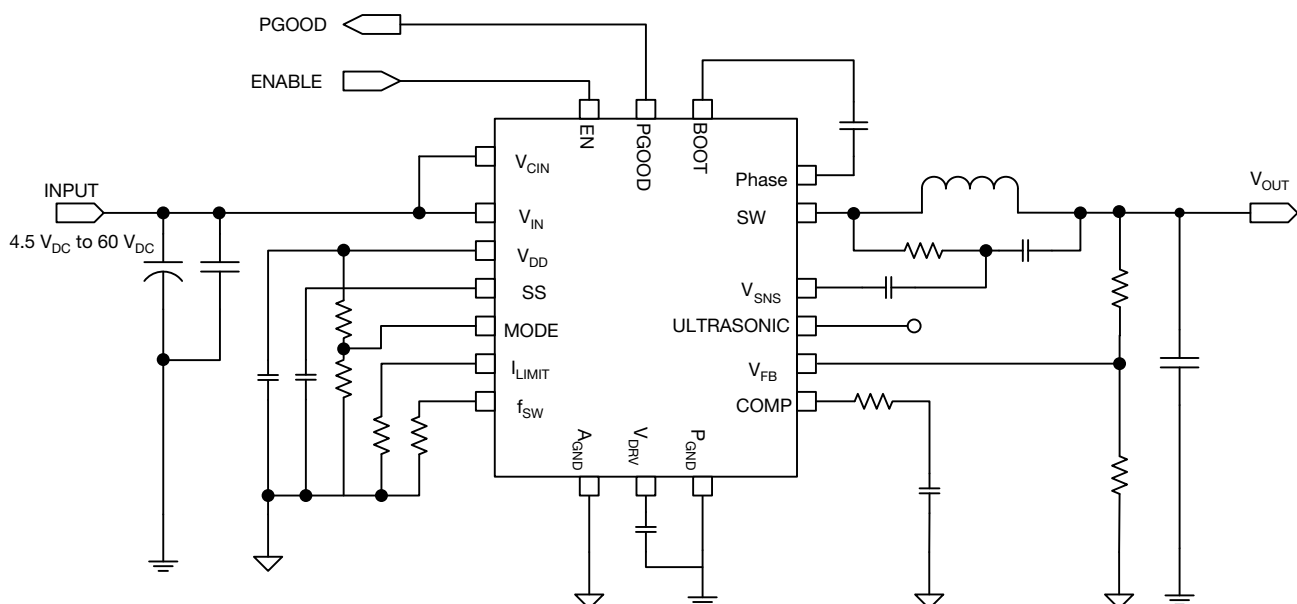
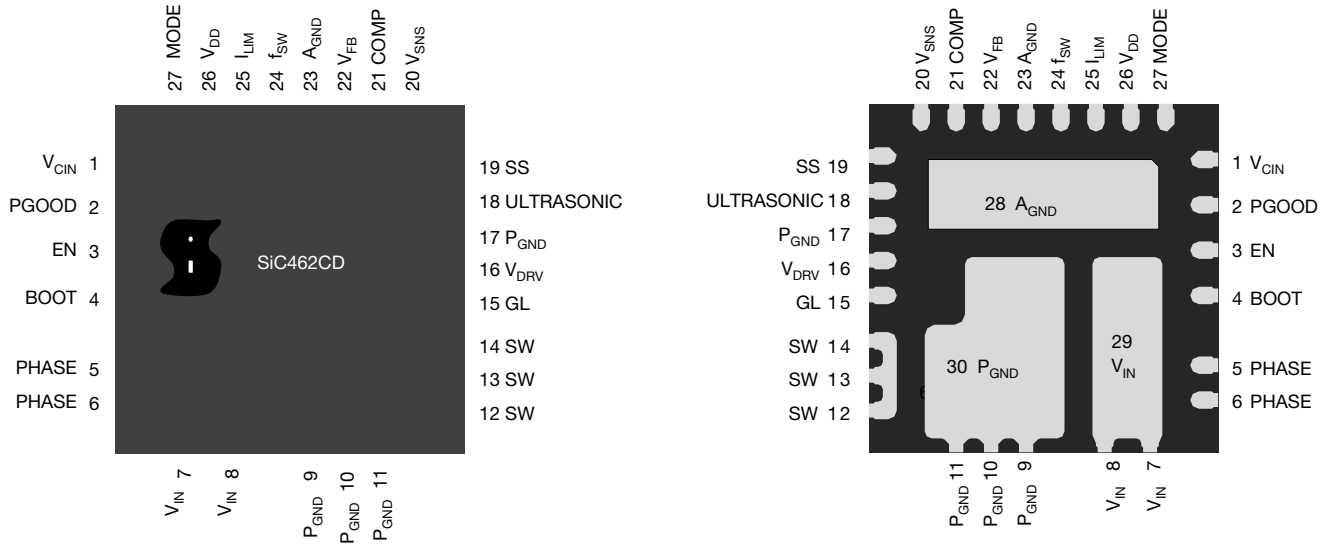



Fig. 1 - Typical Application Circuit for SiC462

**PIN CONFIGURATION**

**Fig. 2 - SiC462 Pin Configuration**

PIN DESCRIPTION		
PIN NUMBER	SYMBOL	DESCRIPTION
1	$V_{CIN}$	Supply voltage for internal logic circuitry
2	PGOOD	Open-drain power good indicator - high impedance indicates power is good. An external pull-up resistor is required
3	EN	Enable pin
4	BOOT	High-side driver bootstrap voltage
5, 6	PHASE	Return path of high-side gate driver
7, 8, 29	$V_{IN}$	Power stage input voltage. Drain of high-side MOSFET
9, 10, 11, 17, 30	$P_{GND}$	Power ground
12, 13, 14	SW	Power stage switch node
15	GL	Low-side MOSFET gate signal
16	$V_{DRV}$	Supply voltage for internal gate driver. When using the internal LDO as a bias power supply, $V_{DD}$ is the LDO output. Connect a 1 $\mu F$ decoupling capacitor to $A_{GND}$
18	ULTRASONIC	Float to disable ultrasonic mode, connect to $V_{DD}$ to enable. Depending on the operation mode set by the MODE pin, power save mode or forced continuous mode will be enabled when the ultrasonic mode is disabled
19	SS	Set the soft start ramp by connecting a capacitor to $A_{GND}$ . An internal current source will charge the capacitor
20	$V_{SNS}$	Power inductor signal feedback pin for system stability compensation
21	COMP	Output of the internal error amplifier. The feedback loop compensation network is connected from this pin to the $V_{FB}$ pin
22	$V_{FB}$	Feedback input for switching regulator used to program the output voltage - connect to an external resistor divider from $V_{OUT}$ to $A_{GND}$
23	$A_{GND}$	Analog ground
24	$f_{SW}$	Set the on-time by connecting a resistor to $A_{GND}$
25	$I_{LIMIT}$	Set the current limit by connecting a resistor to $A_{GND}$
26	$V_{DD}$	Bias supply for the IC. $V_{DD}$ is an LDO output, connect a 1 $\mu F$ decoupling capacitor to $A_{GND}$
27	MODE	Use MODE to set various operation modes. See specification table

ORDERING INFORMATION		
PART NUMBER	PACKAGE	MARKING CODE
SiC462ED-T1-GE3	PowerPAK® MLP55-27L	SiC462
SiC462EVB	Reference board	

**PART MARKING INFORMATION**


- = pin 1 indicator
- P/N = part number code
- B** = Siliconix logo
- △ = ESD symbol
- F = assembly factory code
- Y = year code
- WW = week code
- LL = lot code

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted)			
ELECTRICAL PARAMETER	CONDITIONS	LIMITS	UNIT
EN, $V_{CIN}$ , $V_{IN}$	Reference to $P_{GND}$	-0.3 to +63	V
SW / PHASE	Reference to $P_{GND}$	-0.3 to +66	
SW / PHASE (AC)	100 ns	-4 to +72	
BOOT		-0.3 to $V_{PHASE} + V_{DRV}$	
$A_{GND}$ to $P_{GND}$		-0.3 to +0.3	
All other Pins	Reference to $A_{GND}$	-0.3 to $V_{DD} + 0.3$	
<b>Temperature</b>			
Junction Temperature	$T_J$	-40 to +150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-65 to +150	
<b>Power Dissipation</b>			
Thermal Resistance from Junction to Ambient		2	$^\circ\text{C/W}$
Thermal Resistance from Junction to Case		12	
<b>ESD Protection</b>			
Electrostatic Discharge Protection	Human body model, JESD22-A114	2000	V
	Charged device model, JESD22-A101	750	

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating/conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS (all voltages referenced to GND = 0 V)				
PARAMETER	MIN.	TYP.	MAX.	UNIT
Control Input Voltage ( $V_{CIN}$ ) <sup>(1)</sup>	4.5	-	60	V
Enable (EN)	5	-	60	
Bias Supply ( $V_{DD}$ )	4.75	5	5.25	
Drive Supply Voltage ( $V_{DRV}$ )	4.75	5.3	5.5	
Output Voltage ( $V_{OUT}$ )	0.8	-	$0.8 \times V_{IN}$	
<b>Temperature</b>				
Recommended Ambient Temperature	-40 to +105			$^\circ\text{C}$
Operating Junction Temperature	-40 to +125			


**Note**

<sup>(1)</sup> For input voltages below 5 V, provide a separate supply to  $V_{CIN}$  of at least 5 V to prevent the internal  $V_{DD}$  rail UVLO from triggering.



<b>ELECTRICAL SPECIFICATIONS</b> ( $V_{IN}/V_{CIN} = 48\text{ V}$ , $T_J = -40\text{ °C}$ to $+125\text{ °C}$ , unless otherwise stated)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
<b>Power Supplies</b>						
LDO Output	$V_{DD}$	$V_{IN}/V_{CIN} = 7\text{ V}$ to $55\text{ V}$	-	5	-	V
$V_{DD}$ UVLO Threshold	$V_{DD\_UVLO}$		-	4.25	-	
$V_{DD}$ UVLO Hysteresis	$V_{DD\_UVLO\_HYST}$		-	300	-	mV
Driver Voltage	$V_{DRV}$	$V_{IN}/V_{CIN} = 7\text{ V}$ to $55\text{ V}$	-	5.3	-	V
$V_{DRV}$ UVLO Threshold	$V_{DRV\_UVLO}$		-	4.25	-	
$V_{DRV}$ UVLO Hysteresis	$V_{DRV\_UVLO\_HYST}$		-	300	-	mV
Input Current	$I_{VIN}$	$T_J = 25\text{ °C}$ , non-switching, no load, $V_{FB} > 0.8\text{ V}$	-	-	250	$\mu\text{A}$
Shutdown Current	$I_{VIN\_SHDN}$	$EN = 0\text{ V}$	-	5	10	
<b>Controller and Timing</b>						
Feedback Voltage	$V_{FB}$	$T_J = 25\text{ °C}$	-0.5	-	0.5	%
		$T_J = -40\text{ °C}$ to $+125\text{ °C}$	-1	-	1	
$V_{FB}$ Input Bias Current	$I_{FB}$		-	2	-	nA
Transconductance	$g_m$		-	0.3	-	mS
COMP Source Current	$I_{COMP\_SOURCE}$		-	20	-	$\mu\text{A}$
COMP Sink Current	$I_{COMP\_SINK}$		-	20	-	
On-Time	$t_{ON}$		-	100	-	ns
$t_{ON}$ Accuracy	$t_{ON\_ACCURACY}$		-	10	-	%
On-Time Range	$t_{ON\_RANGE}$		100	-	8000	ns
Frequency Range	$f_{kHz}$	Ultrasonic mode enabled	20	-	1000	kHz
		Ultrasonic mode disabled	-	-	1000	
Minimum Off-Time	$t_{OFF\_min.}$		-	250	-	ns
Soft Start Current	$I_{SS}$		-	5	-	$\mu\text{A}$
Soft Start Voltage	$V_{SS}$	When $V_{OUT}$ reaches regulation	-	1.5	-	V
<b>Power MOSFETs</b>						
High-Side On Resistance	$R_{ON\_HS}$	$V_{GS} = 5.3\text{ V}$	-	25	-	m $\Omega$
Low-Side On Resistance	$R_{ON\_LS}$		-	12	-	
<b>Fault Protections</b>						
Over Current Limit	$I_{OCP}$	Output current (assume 2 A p-p ripple current with 6 A output current), $R_{LIM}$ set for 8 A typ., $T_J = 0\text{ °C}$ to $+125\text{ °C}$	-	8	-	A
Current Limit Setting Range	$I_{LIM\_RANGE}$	$R_{LIM}$	3	-	8	
Current Limit Accuracy	$I_{LIM\_ACCURACY}$	1 % resistor used for $R_{LIM}$	-	20	-	%
Output OVP Threshold	OVP	$V_{FB}$ with respect to 0.8 V reference	-	20	-	
Output UVP Threshold	UVP		-	-80	-	
Over Temperature Protection	OTPR	Rising temperature	-	150	-	$^{\circ}\text{C}$
	OTPHYST	Hysteresis	-	35	-	
<b>Power Good</b>						
Power Good Output Threshold	$V_{FB\_RISING\_VTH\_OV}$	$V_{FB}$ rising above 0.8 V reference	-	20	-	%
	$V_{FB\_FALLING\_VTH\_UV}$	$V_{FB}$ falling below 0.8 V reference	-	-10	-	
Power Good Hysteresis	$P_{GOOD\_HYST}$		-	40	-	mV
Power Good on Resistance	$R_{ON\_PGOOD}$		-	10	-	$\Omega$
Power Good Delay Time	$t_{DLY\_PGOOD}$		-	25	-	$\mu\text{s}$
<b>EN / MODE / Ultrasonic Threshold</b>						
EN Logic High Level	$V_{EN\_H}$		1.4	-	-	V
EN Logic Low Level	$V_{EN\_L}$		-	-	0.4	
EN Pull Down Resistance	$R_{EN}$		-	5	-	M $\Omega$
Ultrasonic Mode High Level	$U_{HIGH}$		2	-	-	V
Ultrasonic Mode Low Level	$U_{LOW}$		-	-	0.8	
Mode Pull Up Current	$I_{MODE}$		-	5	-	$\mu\text{A}$
MODE1		Skip mode enabled, $V_{DD}$ , $V_{DRV}$ Pre-reg on	0	-	0.7	V
MODE2		Skip mode disabled, $V_{DD}$ , $V_{DRV}$ Pre-reg on	1.3	-	1.7	
MODE3		Skip mode disabled, $V_{DRV}$ Pre-reg off, $V_{DD}$ Pre-reg on, provide external $V_{DRV}$	2.3	-	2.7	
MODE4		Skip mode enabled, $V_{DRV}$ Pre-reg off, $V_{DD}$ Pre-reg on, provide external $V_{DRV}$	3.3	-	$V_{DD}$	

**FUNCTIONAL BLOCK DIAGRAM**

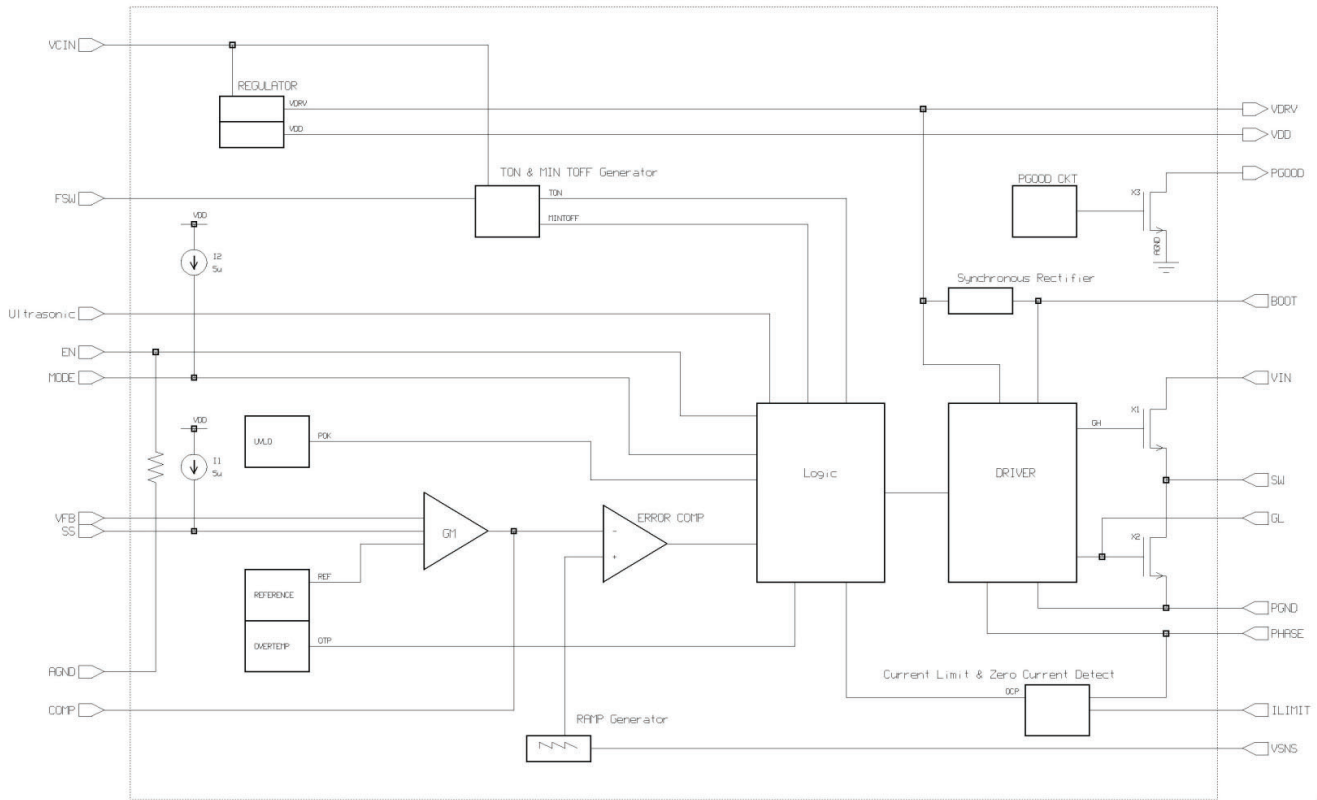

**Fig. 3 - SiC462 Functional Block Diagram**

**OPERATIONAL DESCRIPTION**

**Device Overview**

SiC462 is a high-efficiency synchronous buck regulator capable of delivering up to 6 A continuous current. The device has programmable switching frequency of 100 kHz to 1 MHz. The control scheme delivers fast transient response and minimizes external components. A proprietary V<sup>2</sup>-COT control mechanism enables loop stability regardless of the type of output capacitor used, including low-ESR ceramic capacitors. This device also incorporates a power saving feature by enabling diode emulation mode and frequency fold back as the load decreases.

SiC462 has a full set of protection and monitoring features:

- Over current protection in pulse-by-pulse mode
- Output overvoltage protection
- Output undervoltage protection with device latch
- Over temperature protection with hysteresis
- Dedicated enable pin for easy power sequencing
- Power good open drain output
- This device is available in MLP55-32L package to deliver high power density and minimize PCB area.

**Power Stage**

SiC462 integrates a high-performance power stage with a 25 mΩ n-channel high side MOSFET and a 12 mΩ n-channel low side MOSFET. The MOSFETs are optimized to achieve up to 96 % efficiency.

The power input voltage (V<sub>IN</sub>) can go up to 60 V and down as low as 5 V for power conversion.

**PWM Control Mechanism**

SiC462 employs a voltage - mode COT control mechanism with two voltage (V<sup>2</sup>) feedback loops. The switching frequency, f<sub>SW</sub>, is set by an external resistor to A<sub>GND</sub>, R<sub>fsw</sub>.

$$R_{fsw} = \frac{V_{OUT}}{(f_{SW} \times 190e^{-12})}$$

During steady-state operation, feedback voltage is compared with internal reference (0.8 V typ.) and the amplified error signal (V<sub>COMP</sub>) is generated in the internal comp node. An internally generated ramp signal and V<sub>COMP</sub> are fed into a comparator. Once V<sub>RAMP</sub> crosses V<sub>COMP</sub>, a single shot ON-time pulse is generated for a fixed time, programmed by the external R<sub>fsw</sub>. During the On-time pulse, the high side MOSFET will be turned ON. Once the ON-time pulse expires, the low side MOSFET will be turned ON after a break-before-make period. The low side MOSFET will be on for duration of minimum OFF-time pulse until V<sub>RAMP</sub> crosses V<sub>COMP</sub>. The cycle is then repeated.

Fig. 4 illustrates the basic block diagram for V<sup>2</sup>-COT architecture. In this architecture the following is achieved:

- The reference of a basic ripple control regulator is replaced with a high gain error amplifier loop
- This establishes two parallel voltage regulating feedback

paths, a fast and slow path (hence the term V<sup>2</sup> to indicate two voltage feedback paths)

- The fast path is the ripple injection which ensures rapid correction of the transient perturbation
- The slow path is the error amplifier loop which ensures the DC component of the output voltage follows the internal accurate reference voltage

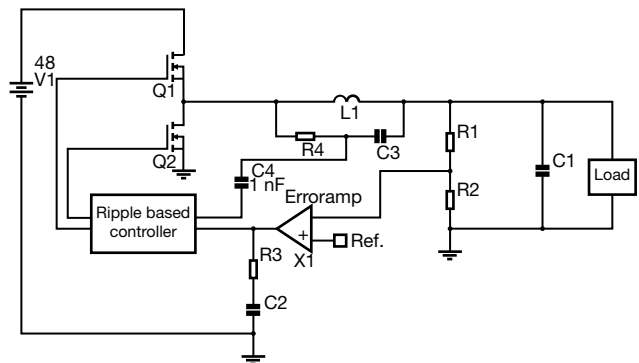


Fig. 4 - V<sup>2</sup>-COT Block Diagram

For stability purposes the SiC462 requires 100 mV of ripple injection. C<sub>X</sub>, C<sub>Y</sub>, and R<sub>X</sub> are selected to achieve the desired ripple injection.

Typically C<sub>Y</sub> is chosen to be ≥ 2 nF to meet the internal impedance of the V<sub>SNS</sub> pin.

C<sub>X</sub> is chosen to be 10 times greater than C<sub>Y</sub>, C<sub>Y</sub> = 20 nF.

$$R_X = (V_{IN} - V_{OUT}) \times (V_{OUT} / (V_{IN} \times f_{SW} \times C_X \times V_{RIPPLE}))$$

Fig. 5 demonstrates the basic operational waveforms:

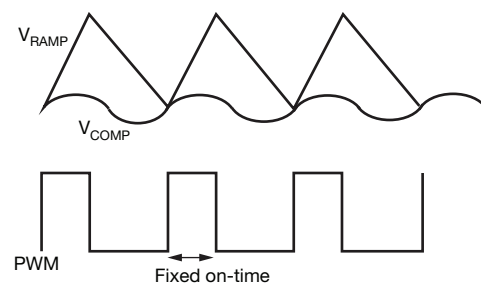


Fig. 5 - V<sup>2</sup>-COT Operational Principle

Typically, the set the frequency of R<sub>COMP</sub> and C<sub>COMP</sub> is chosen to be around the resonance frequency of L<sub>OUT</sub> and C<sub>OUT</sub>.

In this case, set

$$R_{COMP} \times C_{COMP} = \sqrt{L_{OUT} \times C_{OUT}}$$

For good slew rate / transient load response, pick C<sub>COMP</sub> ≤ 1 nF, R<sub>COMP</sub> can be calculated according the formula above.

### Power-Save Mode, MODE Pin, and Ultrasonic Pin Operation

To improve efficiency at light-load condition, SiC462 provides a set of innovative implementations to eliminate LS re-circulating current and switching losses. The internal zero crossing detector (ZCD) monitors LX node voltage to determine when inductor current starts to flow negatively. In power saving mode, as soon as inductor valley current crosses zero, the device first deploys diode emulation mode by turning off LS FET. If load further decreases, switching frequency is further reduced proportional to load condition to save switching losses while keeping output ripple within tolerance. The switching frequency is set by the controller to maintain regulation. If the ultrasonic pin is tied to  $V_{DD}$ , the minimum switching frequency that the regulator will drop to, as load decreases, is 20 kHz to avoid switching frequencies in the audible range. If this feature is not required this ultrasonic mode can be disabled by floating the ultrasonic pin. When the ultrasonic mode is disabled, the regulator will either operate in forced continuous mode or in a power save mode where there is no limit to the lower frequency limit. In this state, at zero load switching frequency can go as low as hundreds of Hz.

If a 5 V rail is available in the system, the customer can provide this as the  $V_{DRV}$  voltage instead of using the internal  $V_{DRV}$  regulator. This allows for power savings because power is not dissipated in the internal regulator.

The MODE pin supports several modes of operation as shown below. An internal current source is used to set the voltage on this pin using an external resistor:

TABLE 1 - OPERATION MODES	
MODE1 0 V to 0.7 V	Power save mode enabled, $V_{DD}, V_{DRV}$ Pre-reg on
MODE2 1.3 V to 1.7 V	Power save mode disabled, $V_{DD}, V_{DRV}$ Pre-reg on
MODE3 2.3 V to 2.7 V	Power save mode disabled, $V_{DRV}$ Pre-reg off, $V_{DD}$ Pre-reg on, provide external $V_{DRV}$
MODE4 3.3 V to $V_{DD}$	Power save mode enabled, $V_{DRV}$ Pre-reg off, $V_{DD}$ Pre-reg On, provide external $V_{DRV}$

The mode pin is not latched to any state and can be changed on the fly.

## OUTPUT MONITORING AND PROTECTION FEATURES

### Output Over-Current Protection (OCP)

SiC462 has cycle by cycle current limiting. The inductor valley current is monitored during LS FET turn-on period through  $R_{DS(on)}$  sensing. After a pre-defined blanking time, the valley current is compared with an internal threshold. If monitored current is higher than threshold, HS turn-on pulse is skipped and LS FET is kept on until the valley current returns below OCP limit.

In the severe over-current condition, cycle by cycle current limit eventually triggers output undervoltage protection (UVP) and the device will go into hiccup mode as described in the next section.

OCP is enabled immediately after  $V_{CC}$  passes UVLO level. OCP is set by an external resistor to  $A_{GND}$ ,  $R_{LIM}$ .

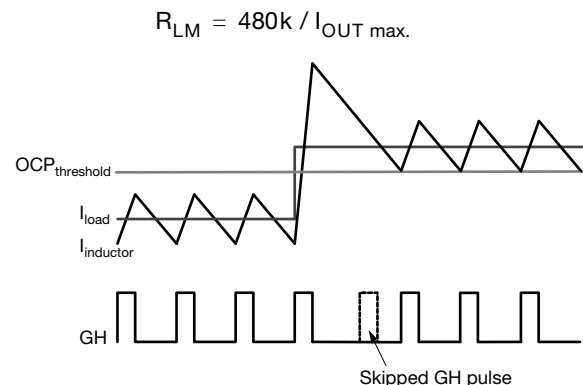


Fig. 6 - Over-Current Protection Illustration

### Output Undervoltage Protection (UVP)

UVP is implemented by monitoring output through  $V_{FB}$  pin. If the voltage level at  $V_{FB}$  goes below 0.16 V ( $V_{OUT}$  is 20% of  $V_{OUT}$  set point) for more than 25  $\mu$ s, then a UVP event is recognized and both HS and LS MOSFETs are turned off. After a period of 20 soft start cycles, the IC attempts to re-start and goes through a soft start cycle. If the fault condition still exists, the above cycle will be repeated.

UVP is only active after the completion of soft-start sequence.

### Output Over-Voltage Protection (OVP)

For OVP implementation, output is monitored through FB pin. After soft start, if the voltage level at FB is above 0.96 V (typ.) ( $V_{OUT}$  is 120 % of  $V_{OUT}$  set point), OVP is triggered with both the HS and LS MOSFETs turned off. Normal operation is resumed once FB voltage drops back to 0.96 V.

OVP is active immediately after  $V_{CC}$  passes UVLO level.

### Over-Temperature Protection (OTP)

SiC462 has internal thermal monitor block that turns off both HS and LS FETs when junction temperature is above 150  $^{\circ}$ C (typ). A hysteresis of 35  $^{\circ}$ C is implemented, so when junction temperature drops below 115  $^{\circ}$ C, the device restarts by initiating soft-start sequence again.

### Sequencing of Input / Output Supplies

SiC462 has no sequencing requirements on any of its input/output ( $V_{IN}$ ,  $V_{DRV}$ ,  $V_{DD}$ ,  $V_{CIN}$ , EN) supplies or enables.

### Enable

The SiC462 has an enable pin to turn the part on and off. Driving this pin high enables the device, while grounding it turns it off.

The SiC462 enable has a weak pull down to prevent unwanted turn on due to a floating GPIO.

There are no sequencing requirements w.r.t other input/output supplies.

### Soft-Start


SiC462 soft-start time is adjustable by selecting a capacitor value from the following equation. Once  $V_{CC}$  is above UVLO level (2.55 V typ.),  $V_{OUT}$  will ramp up slowly, rising monotonically to the programmed output voltage. There is an internal  $5 \mu\text{A}$  current source tied to the soft start pin which charges the external soft start cap.

$$\text{SS time} = \frac{C_{\text{ext}} \times 0.8 \text{ V}}{5 \mu\text{A}}$$


During soft-start period, OCP is activated. Short-circuit protection is not active until soft-start is complete.

### Pre-Bias Start-Up

In case of pre-bias startup, output is monitored through FB pin. If the sensed voltage on FB is higher than the internal reference ramp value, control logic prevents HS and LS FET from switching to avoid negative output voltage spike and excessive current sinking through LS FET.

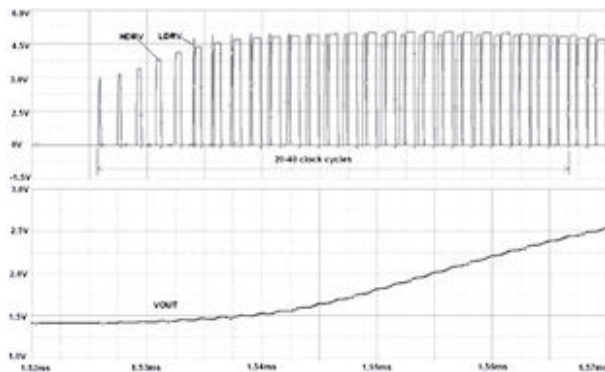

**Fig. 7 - Pre-bias Start-up**

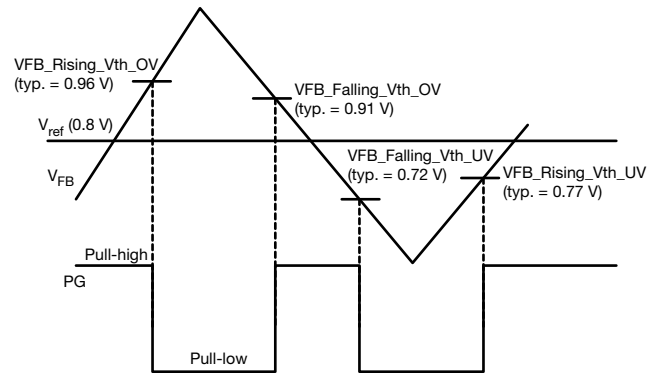


**Fig. 8 - PGOOD Window and Timing Diagram**

### Power Good

SiC462's power good is an open-drain output. Pull PGOOD pin high up to 5 V through a 10K resistor to use this signal. Power good window is shown in the diagram above. If voltage level on FB pin is out of this window, PG signal is de-asserted by pulling down to GND. To prevent false triggering during transient events, PGOOD has a  $25 \mu\text{s}$  blanking time.



REFERENCE BOARD SCHEMATIC

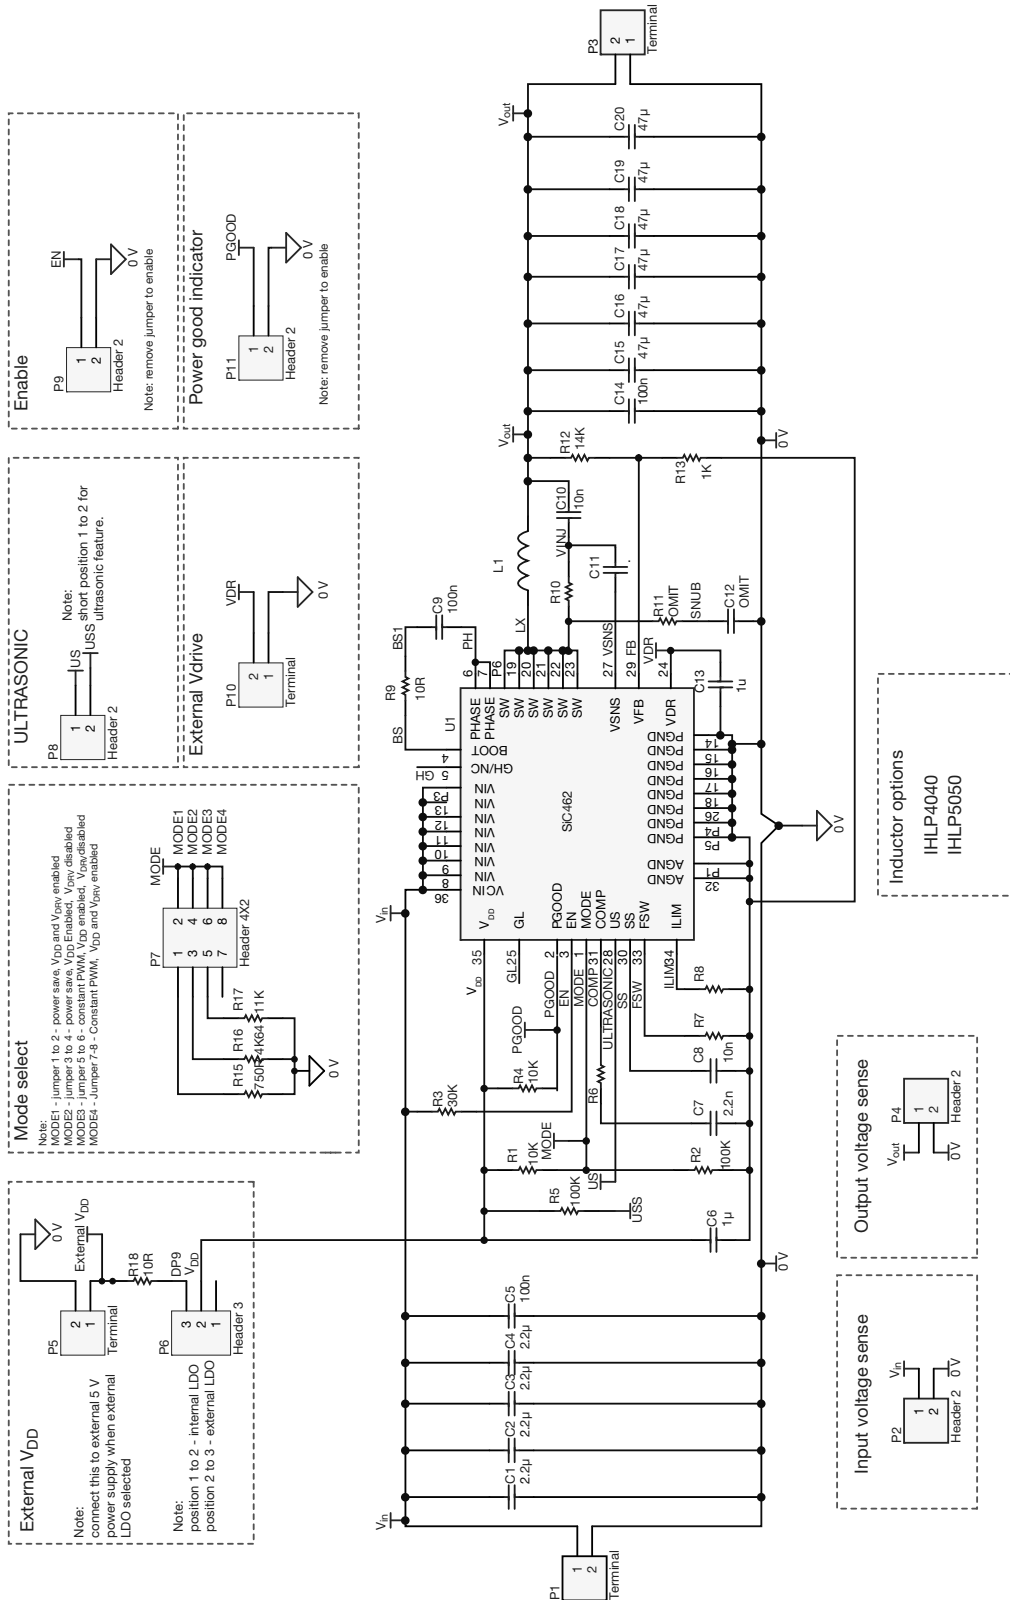



BILL OF MATERIAL						
ITEM	QTY	REFERENCE	PCB FOOTPRINT	DESCRIPTION	PART NUMBER	LIBREF
1	4	C1, C2, C3, C4	3216 (1206)	2.2 $\mu$ F, 100 V ceramic capacitor	12061C225KAT2A	CAP2u2100V
2	3	C5, C9, C14	1608 (0603)	100 nF, 100 V ceramic capacitor	GRM188R72A104KA35D	CAP100n100V
3	2	C6, C13	1005 (0402)	1 $\mu$ F, 6.3 V ceramic capacitor	04026D105KAT2A	CAP1u6.3V
4	2	C7, C8	1005 (0402)	Capacitor (Semiconductor SIM model)	Ceramic	Cap Semi
5	1	C10	1608 (0603)	10 nF, 100 V ceramic capacitor	06031C103KAT2A	CAP10n100V_1_1
6	2	C11, C12	1608 (0603)	1 nF, 100 V ceramic capacitor	06031C102KAT2A	CAP1n100V
7	6	C15, C16, C17, C18, C19, C20	3216 (1206)	47 $\mu$ F, 16 V ceramic capacitor	C3216C5R1C476M160AB	CAP47u16V
8	1	L1	IHLP-5050	-	Inductor	B82559A0242A013
9	2	P1, P3	TERM2B	Header, 2-pin	Terminal	Header 2
10	5	P2, P4, P8, P9, P11	HDR1X2	Header, 2-pin	Header 2	Header 2
11	2	P5, P10	TERM2	Header, 2-pin	Terminal	Header 2
12	1	P6	HDR1X3	Header, 3-pin	Header 3	Header 3
13	1	P7	HDR2X4	Header, 4-pin, dual row	Header 4X2	Header 4X2
14	16	R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R12, R13, R15, R16, R17, R18	1005 (0402)	Resistor	Res1	Res1
15	1	R11	2012 (0805)	Resistor	Res1	Res1
16	1	U1	MLP56-30L	55 V buck regulator	SiC462	SiC462



## EXTERNAL COMPONENT SELECTION FOR THE SiC462

A reference design has been developed to illustrate how to choose component values for proper operation of the SiC462. The schematic for the demo board is shown in Fig. 9 and Table 2.

### Demo Board Connection and Signal / Test Points

#### Power Sockets

**V<sub>IN</sub>, GND (P1):** input voltage source with V<sub>IN</sub> to be positive. Connect to a voltage source:

**V<sub>OUT</sub>, GND (P3):** output voltage with V<sub>OUT</sub> to be positive. Connect to a load that draws no more than:

**5 V, GND (P10):** external 5 V MOSFET gate voltage source with 5 V to be the positive input. Apply 5 V when Mode 3 or Mode 4 is selected.

#### Selection Jumpers

##### Mode Select

**P7:** this is an 8 way header which allows the user to select one of four modes of operation.

**MODE1 - SHORT PIN 1 to 2** Power save, V<sub>DRV</sub> and Pre-reg on

**MODE2 - SHORT PIN 3 to 4** Forced PWM, V<sub>DRV</sub> and Pre-reg on

**MODE3 - SHORT PIN 5 to 6** Forced PWM, V<sub>DRV</sub> and Pre-reg off - external 5 V supply

**MODE4 - SHORT PIN 7 to 8** Power save, V<sub>DRV</sub> and Pre-reg off - external 5 V supply

##### V<sub>DRV</sub> External Supply

**P10:** this is a 2 way header that will enable the user to supply an external MOSFET gate driver supply if an external 5 V supply is available. This should only be used in MODES 3 and 4.

##### ENABLE

**P9:** this is a 2 way header that will enable the part if left open. When shorted the part is disabled.

**OPEN Pin 1-2** - automatic enable on power up

**SHORT Pin 1-2** - IC disabled.

##### Ultrasonic

**P8:** this is a 2 way header that will enable the user to select the ultrasonic mode of operation. In ultrasonic mode the minimum frequency of operation is 20 kHz, above the audible range. When not in ultrasonic mode the frequency can drop below 20 kHz.

**OPEN Pin 1-2** - ultrasonic disabled

**SHORT Pin 1-2** - ultrasonic enabled

### SIGNALS AND TEST LEADS

#### Input Voltage Sense

**V<sub>IN\_SENSE</sub>, GND<sub>IN\_SENSE</sub> (P2):** this allows the user to measure the voltage at the input of the regulator and remove any losses generated due to the, connections from the measurement. This can also be used by a power source with sense capability.

#### Output Voltage Sense

**V<sub>OUT\_SENSE</sub>, GND<sub>OUT\_SENSE</sub> (P4):** this allows the user to measure the voltage at the output of the regulator and remove any losses generated due to the connections, from the measurement. This can also be used by an active load with sense capability.

#### POWER GOOD INDICATOR

**PGOOD (P11):** is an open drain output and is pulled up with a 10 kΩ resistor to V<sub>IN</sub>. When FB or V<sub>OUT</sub> are within -10 % to +20 % of the set voltage this pin will go HI to indicate the output is okay.

#### POWER UP PROCEDURE

To turn-on the reference board, apply 12 V to V<sub>IN</sub> with the P7 jumper is in position 1. If the P7 jumper is in place 1 the board will come up in power save mode, if in place 2 then constant PWM will be observed.

When applying higher than 12 V to the input it is reasonable to install a RC snubber from LX to GND if needed however this will affect efficiency. There are place holders on the reference board, R11 and C12 for the snubber. Values of 4 Ω and 1 nF are a reasonable starting point.

#### ADJUSTMENTS TO THE REFERENCE BOARD

##### OUTPUT VOLTAGE ADJUSTMENT

If a different output voltage is needed, simply change the value of V<sub>OUT</sub> and solve for R12 based on the following formula:

$$R_{12} = \frac{R_{13}(V_{OUT} - V_{FB})}{V_{FB}}$$

Where V<sub>FB</sub> is 0.8 V for the SiC46X. R<sub>BOTTOM</sub> (R13) should be a maximum of 10 kΩ to prevent V<sub>OUT</sub> from drifting at no load.

##### CHANGING SWITCHING FREQUENCY

The following equation illustrates the relationship between on-time, V<sub>IN</sub>, V<sub>OUT</sub>, and R<sub>fsw</sub> value:

$$R_{fsw} = R_7 = \frac{V_{OUT}}{f_{sw} \times 190e^{-12}}$$

##### OUTPUT RIPPLE VOLTAGE

There is no requirement for this converter to see output capacitor ripple voltage in the control loop as a voltage injection circuit is employed; the voltage injection ramp is used to alert the converter to the next switch event.

Output ripple voltage is measured with a tip and barrel measurement across C<sub>OUT</sub>; the barrel of the probe is the GND / 0 V connection and this removes the effect of the long

GND / 0 V leads of the probe. Typically output ripple voltage is set to 3 % to 5 % of the output voltage, but an all ceramic output solution can bring output ripple voltage to a much lower level since the ESR of ceramics can be in the range of mΩ's.

### VOLTAGE INJECTION NETWORK

This is the network seen placed across the output inductor in the schematic consisting of R10, C10 and C11. A quick method to add or remove injection is to reduce or increase R10.

The time constant of the inductor,  $\tau_{IND}$ , and voltage injection network are as follows:

$$\tau_{IND} = \frac{L}{DCR}$$


and

$$\tau_{INJ} = R_L \times C_L$$

In order to set a correct magnitude, the SiC46x requires around 100 mV, the following equation is used:

$$R_L = (V_{IN} - V_{OUT}) \times \left( \frac{V_{OUT}}{V_{OUT} \times f_{sw} \times C_L \times V_{INJECTION}} \right)$$

Where  $V_{INJECTION} = 100\text{mV}$  is the midpoint of the ripple injection RC circuit.

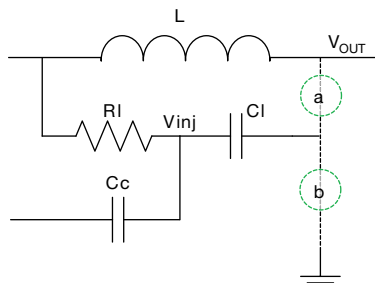

**Fig. 9 - Voltage Injection Circuit**

In fig. 1 the recommended value of  $C1 = C10$  (a or b)  $\approx 2.2 \text{ nF}$  and  $Cc = C11 \approx 22 \text{ nF}$ .

The reference design allows placement of C1 in two positions as shown in fig. 1, “a” and “b”. The “b” option removes the output ripple and transient response voltage from the injection signal. The effect of connecting the C1 capacitor to GND / 0 V is that some of the output information is removed from the fast loop however the output will be very stable in this setup when large transient loads are experienced at the output; in any case you will notice that the effective impedance of the output node is very small and the FB loop will react quickly enough for all loads. Another key aspect of using the GND / 0 V connection for the injection circuit is the ability to use a smaller output capacitance.

Be aware that the b) option is should only be used with forced PWM operation.

$$V_{INJ} = (V_{IN_{min.}} - V_{OUT}) \times \left( 1 - \frac{1}{e^{\frac{t}{\tau_{IN}}}} \right)$$

Where t is the ON period. The required magnitude is  $\sim 100 \text{ mVpp}$  for stable operation.

### Compensation

The COT loop uses a transconductance amplifier to convert a proportional current from the output voltage,  $V_{FB}$ . This has the effect of offering a high impedance at the  $V_{FB}$  node, however this circuitry is left with a wide bandwidth to accommodate the different switching frequencies. This will require rolling off with an RC circuit, use the following equation:

$$R_{COMP} = \frac{\sqrt{L \times C_{OUT}}}{C_{COMP}}$$

$C_{COMP}$  will be set to 1 nF. This provides a frequency breakpoint around the LC filter peak. It may be necessary to reduce the roll off further, this can be a choice of the designer but an example might be to start at 1/2 the LC filter peak frequency. This will affect the transient response time, something to note is the minimal phase delay in the COT topology and its fast response compared to PWM converters.

### INDUCTOR SELECTION

The choice of inductor is specific to each application and quickly determined with the following equations:

$$t_{ON} = \frac{V_{OUT}}{V_{IN_{max.}} \times f_{sw}}$$

and

$$L = \frac{(V_{IN} - V_{OUT}) \times t_{ON}}{I_{OUT_{max.}} \times K}$$

Where K is a percentage of maximum output current ripple required. The designer can quickly make a choice of inductor if the ripple percentage is decided, usually no more than 30 % however higher or lower percentages of  $I_{OUT}$  can be acceptable depending on application. This device allows choices larger than 30 %.

Other than the inductance the DCR and saturation current parameters are key values. The DCR causes an  $I^2R$  loss which will decrease the system efficiency and generate heat. The saturation current has to be higher than the maximum output current plus  $\frac{1}{2}$  of the ripple current. In an over current condition the inductor current may be very high. All this needs to be considered when selecting the inductor.

On this board Vishay IHLP series inductors are used to meet cost requirement and high efficiency, a part that utilizes a material that has incredible saturation behaviour compared to competing products.



## OUTPUT CAPACITOR SELECTION

Voltage rating, ESR, transient response, overall PCB area and cost are requirements for selecting output capacitors. The types of capacitors and their general advantages and disadvantages are covered next.

Electrolytic have high ESR, dry out over time so ripple current rating must be examined and have slower transient response, but are fairly inexpensive for the amount of overall capacitance.

Tantalums can come in low ESR varieties and high capacitance value for its overall size, but they fail short when damaged and also have slower transient response.

Ceramics have very low ESR, fast transient response and overall small size, but come in low capacitance values compared to the others types. A combination of technology is sensible, however these converters suit a ceramic solution also.

The output capacitance will be determined by the ripple voltage requirement. Voltage mode COT topology can work with very small values of capacitor ESR.

The following equations are used to calculate the size needed to meet a transient load response:

$$I_{LPK} = I_{max.} + 0.5 \times I_{RIPPLE\_max.}$$

and

$$C_{OUT\_min.} = I_{LPK} \times \frac{L \times \frac{I_{LPK}}{V_{OUT}} - \frac{I_{max.}}{dI_{LOAD}} \times dt}{2 \times (V_{PK} - V_{OUT})}$$

Where  $I_{LPK}$  is the peak inductor current,  $I_{MAX.}$  is the maximum output current,  $dI_{LOAD}$  is the current step in  $\mu s$  and  $V_{PK}$  is the peak voltage, the output voltage summed with the specified over and under shoot.

The evaluation PCB is fitted with 66  $\mu F$ .

## ENABLE PIN VOLTAGE

The EN pin has an internal pull down resistor and only requires an enable voltage. This needs to be greater than 1.4 V. An input voltage or a resistor connected across  $V_{IN}$  and EN can be used. The internal pull down resistance is 5 M $\Omega$ .

## SOFT START SETTING

Soft start is a useful function helping to limit the current magnitude from the source at switch on. This is simply set with a ceramic capacitor using the following equation:

$$t_{SS} = \frac{C_{SS} \times 0.8}{5e^{-6}}$$

A 100 nF capacitor will provide ~ 16 ms soft start time.  $V_{DD}$  pin will need to be decoupled in order to provide a stable voltage internally and externally. The value for this capacitor is recommended as  $\geq 1 \mu F$ .

## CURRENT LIMIT RESISTOR

The current limit is set by placing a resistor between pins LXS and  $I_{LIM}$ . The values can be found using the following equation:

$$R_{ILIM} = \frac{480000}{I_{OUT\_max.}}$$

## INPUT CAPACITANCE

In order to keep the design compact and minimize parasitic elements, ceramic capacitors will be chosen. The initial requirement for the input capacitance is decided by the maximum input voltage, 60 V in this case however a 100 V rated capacitor will be chosen of the X7R variety. The footprint will be a compact 1206.

In order to determine the minimum capacitance the input voltage ripple needs to be specified;  $V_{CINPP} \leq 500$  mV is a suitable starting point. This magnitude is determined by the final application specification. The input current needs to be determined for the lowest operating input voltage,

$$I_{CIN(RMS)} = \frac{I_{OUT}}{V_{IN}} \times \sqrt{V_{OUT} \times (V_{IN} - V_{OUT})}$$







The minimum input capacitance can then be found,

$$C_{IN\_min.} = I_{OUT} \times \frac{DC - (1 - DC)}{V_{CINPKPK} \times f_{sw}}$$

For output voltage greater than 5 V the input capacitance should be increased accordingly. As the output power increases so does the input voltage ripple, the evaluation PCB has 4.4  $\mu F$ .

## Note

- If the input voltage becomes very small then extra capacitance needs adding to the input as the ripple will affect the duty cycle calculation when larger current is required.

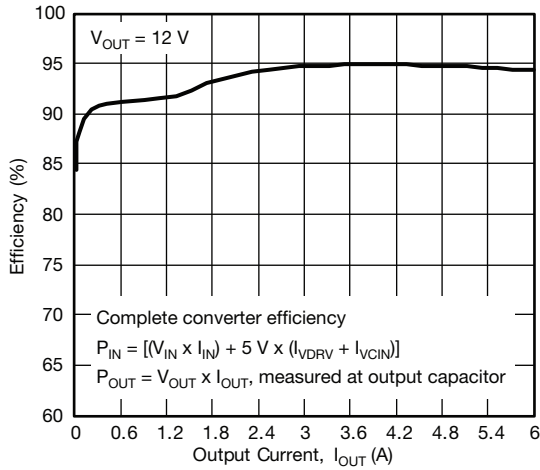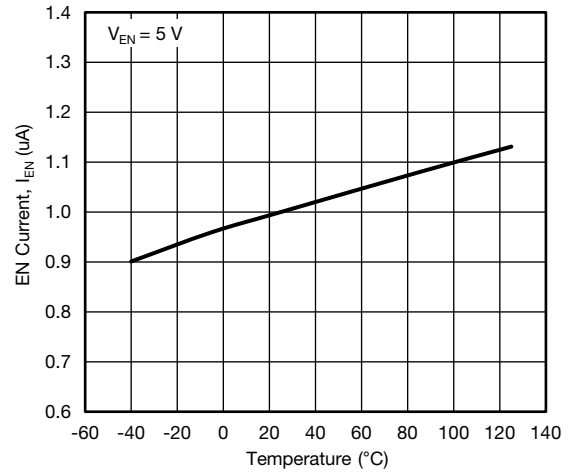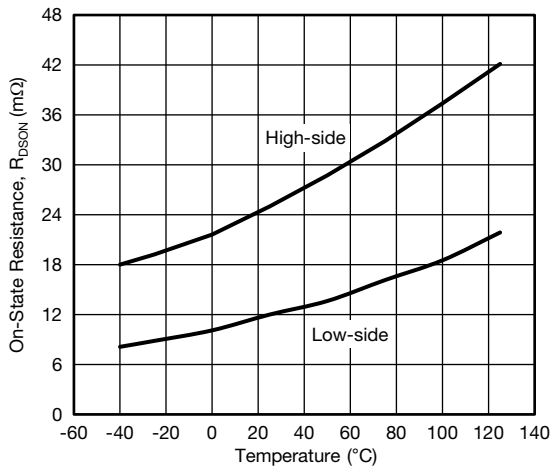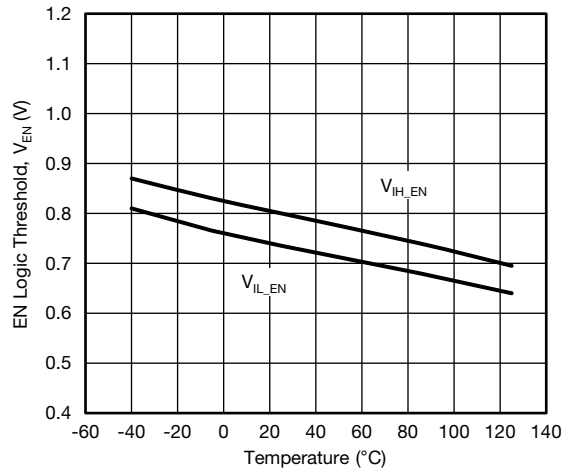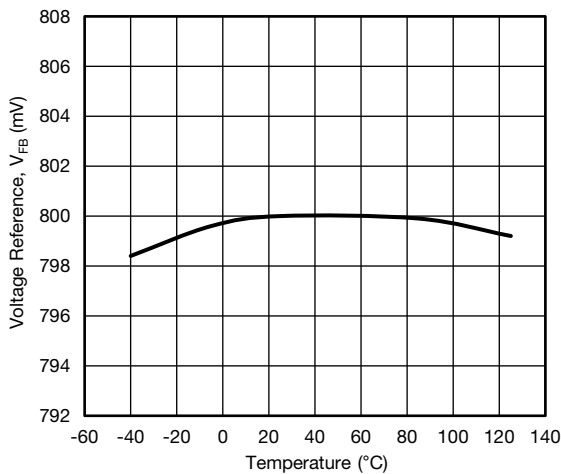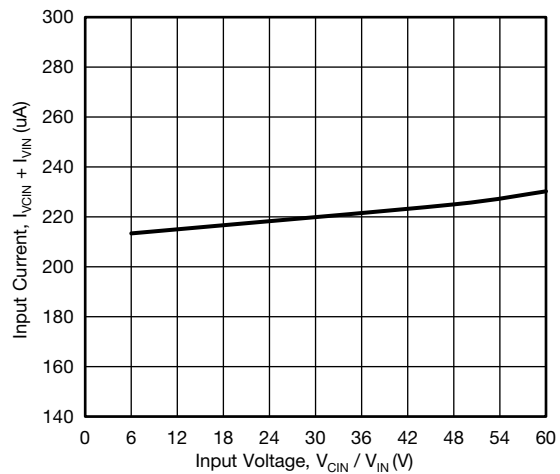**ELECTRICAL CHARACTERISTICS** ( $V_{IN} = 48\text{ V}$ ,  $V_{OUT} = 5\text{ V}$ ,  $f_{sw} = 300\text{ kHz}$ ,  $L = 15\text{ }\mu\text{H}$ , unless noted otherwise)

**Fig. 10 - Efficiency vs. Output Current**

**Fig. 13 -  $\overline{\text{EN}}$  Current vs. Junction Temperature**

**Fig. 11 - On Resistance vs. Temperature**

**Fig. 14 -  $\overline{\text{EN}}$  Logic Threshold vs. Junction Temperature**

**Fig. 12 - Voltage Reference vs. Junction Temperature**

**Fig. 15 - Input Current vs. Input Voltage**

**ELECTRICAL CHARACTERISTICS** ( $V_{IN} = 48\text{ V}$ ,  $V_{OUT} = 5\text{ V}$ ,  $f_{sw} = 300\text{ kHz}$ ,  $L = 15\text{ }\mu\text{H}$ , unless noted otherwise)

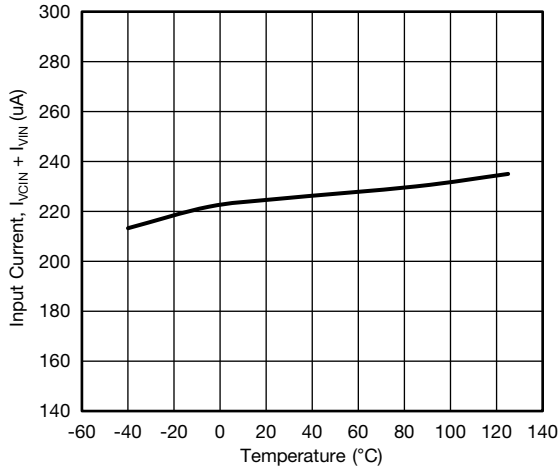


Fig. 16 - Input Current vs. Junction Temperature

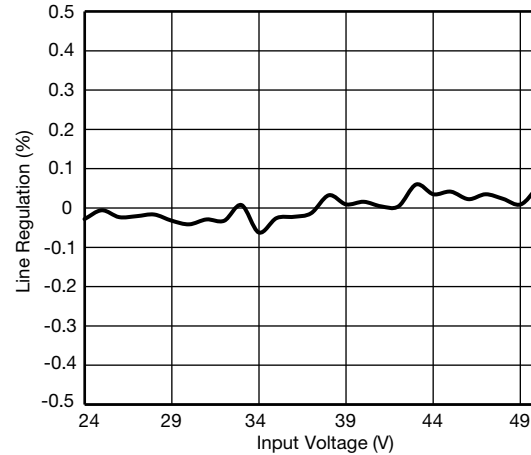


Fig. 19 - Line Regulation,  $V_{OUT} = 12\text{ V}$

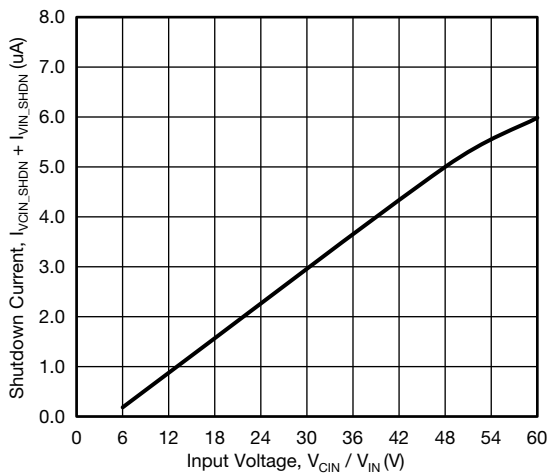


Fig. 17 - Shutdown Current vs. Input Voltage

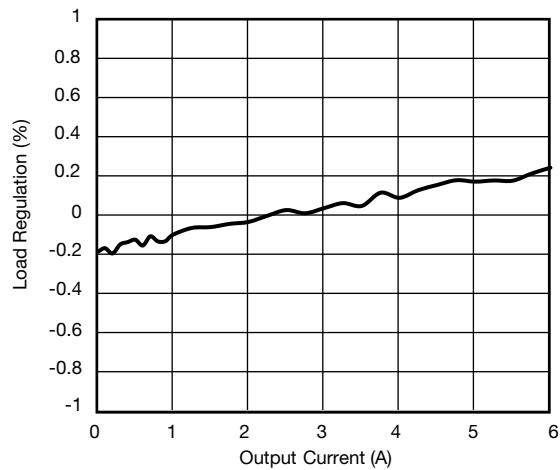


Fig. 20 - Load Regulation,  $V_{OUT} = 12\text{ V}$

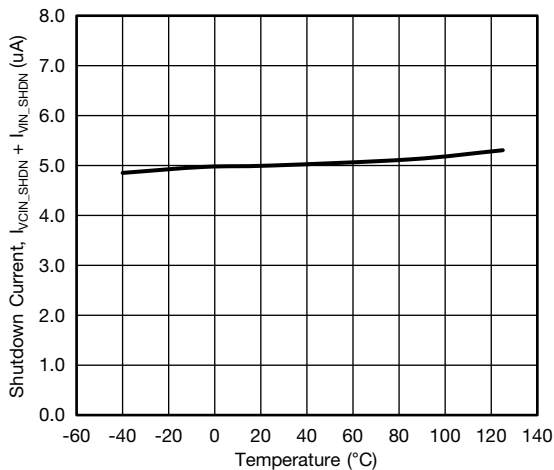


Fig. 18 - Shutdown Current vs. Junction Temperature



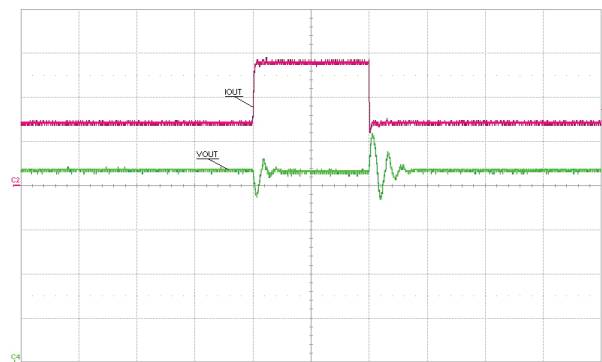



Fig. 21 - Load Transient - CH2 (RED) =  $I_{OUT}$  (2 A/div), CH4 (GREEN) =  $V_{OUT}$  (200 mV/div), Time = 100  $\mu\text{s}$ /div

**ELECTRICAL CHARACTERISTICS** ( $V_{IN} = 48\text{ V}$ ,  $V_{OUT} = 5\text{ V}$ ,  $f_{sw} = 300\text{ kHz}$ ,  $L = 15\text{ }\mu\text{H}$ , unless noted otherwise)


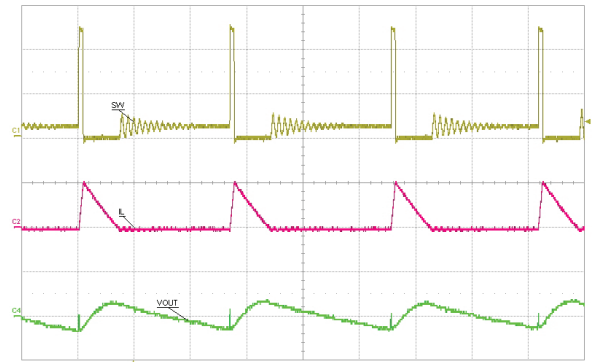
**Fig. 22 - Load Line Transient (8 V to 48 V) - CH1 (YELLOW) =  $V_{IN}$  (20 V/div), CH3 (RED) = EN (5 V/div), CH4 (GREEN) =  $V_{OUT}$  (2 V/div), Time = 10 ms/div**

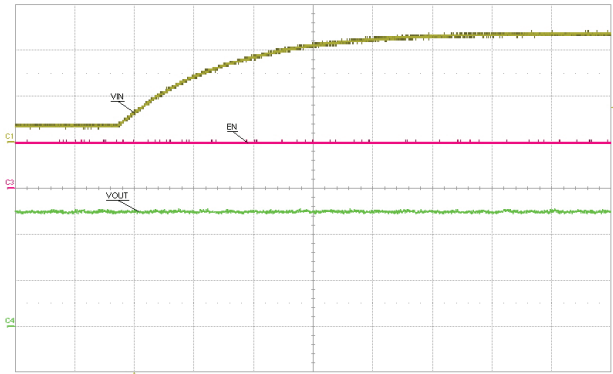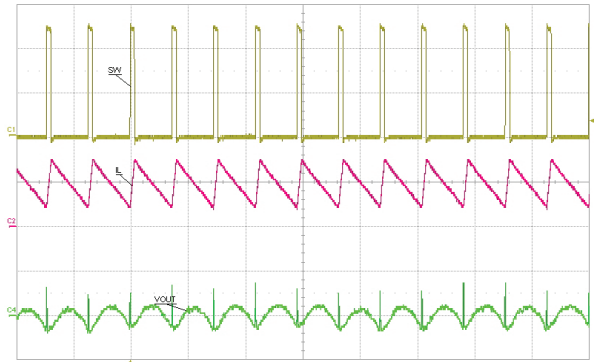


**Fig. 25 - Output Ripple 2 A - CH1 (YELLOW) = SW (20 V/div), CH2 (RED) =  $I_L$  (2 A/div), CH4 (GREEN) =  $V_{OUT}$  (20 mV/div), Time = 5  $\mu\text{s}$ /div**

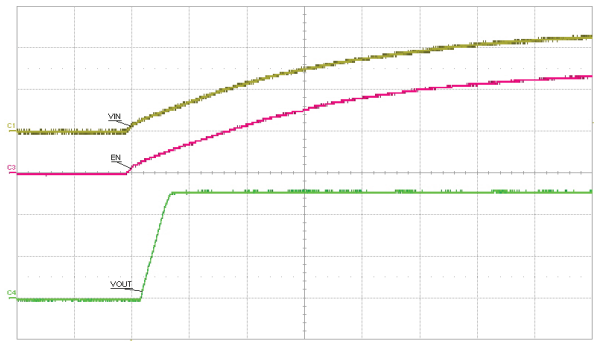


**Fig. 23 - Start-Up with  $V_{IN}$  - CH1 (YELLOW) =  $V_{IN}$  (20 V/div), CH3 (RED) = EN (20 V/div), CH4 (GREEN) =  $V_{OUT}$  (2 V/div), Time = 5 ms/div**



**Fig. 26 - Output Ripple 300 mA - CH1 (YELLOW) = SW (20 V/div), CH2 (RED) =  $I_L$  (2 A/div), CH4 (GREEN) =  $V_{OUT}$  (50 mV/div), Time = 5  $\mu\text{s}$ /div**

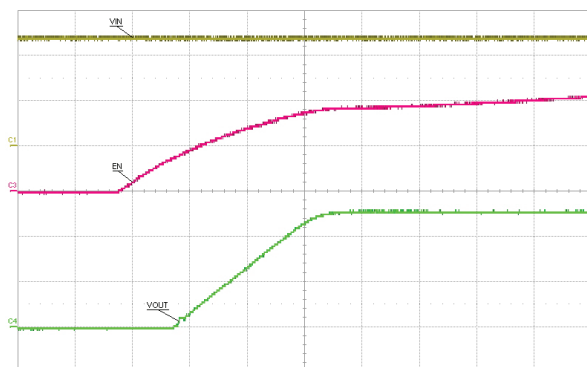


**Fig. 24 - Start-Up with EN - CH1 (YELLOW) =  $V_{IN}$  (20 V/div), CH3 (RED) = EN (2 V/div), CH4 (GREEN) =  $V_{OUT}$  (2 V/div), Time = 1 ms/div**

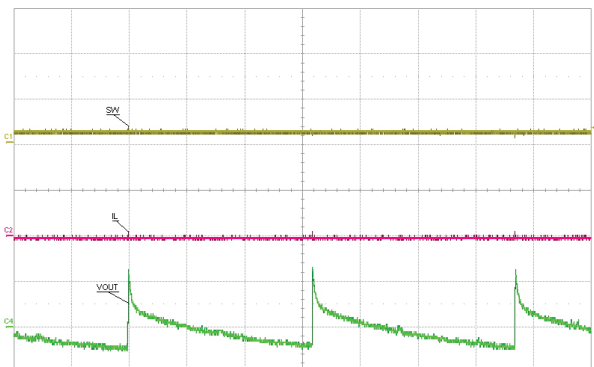


**Fig. 27 - Output Ripple PSM - CH1 (YELLOW) = SW (20 V/div), CH2 (RED) =  $I_L$  (2 A/div), CH4 (GREEN) =  $V_{OUT}$  (20 mV/div), Time = 10 ms/div**

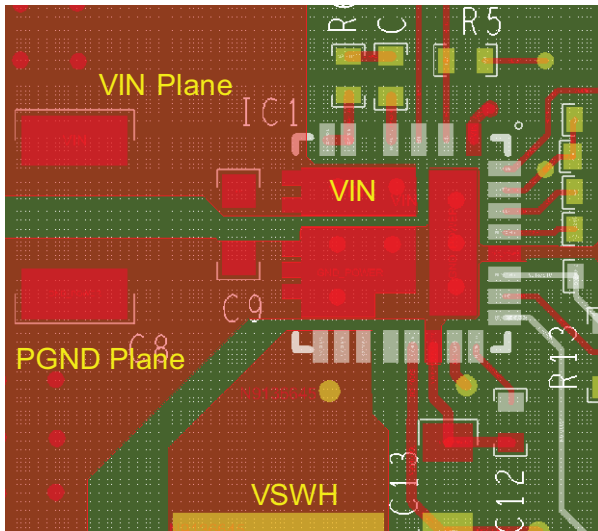


**PCB LAYOUT RECOMMENDATIONS**
**Step 1:  $V_{IN}/GND$  Planes and Decoupling**

**Fig. 28**

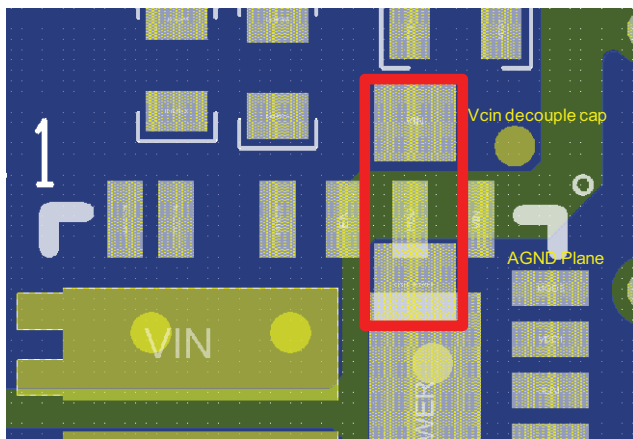
1. Layout  $V_{IN}$  and  $P_{GND}$  planes as shown above.
2. Ceramic capacitors should be placed between  $V_{IN}$  and  $P_{GND}$ , and very close to the device for best decoupling effect.
3. Different values / packages of ceramic capacitors should be used to cover entire decoupling spectrum e.g. 1210 and 0603.
4. Smaller capacitance values, placed closer to device's  $V_{IN}$  pin(s), is better for high frequency noise absorbing.

**Step 2:  $V_{CIN}$  Pin**

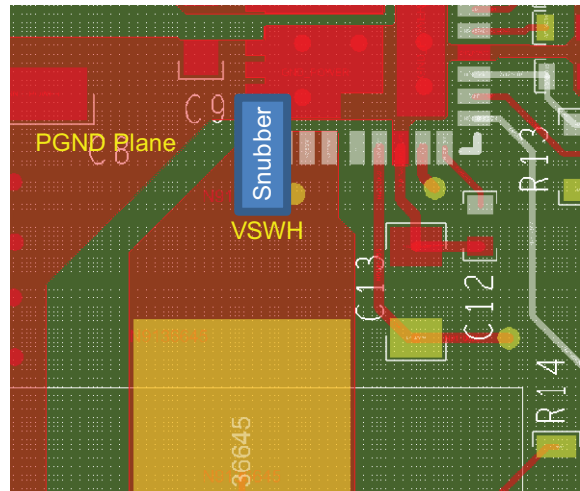**Fig. 29**


1.  $V_{CIN}$  (pin 1) is the input pin for both internal LDO and  $t_{ON}$  block.  $T_{ON}$  time varies based on input voltage. It's necessary to put a decoupling capacitor close to this pin.
2. The connection can be made through a via and the cap can be placed at bottom layer.

**Step 3:  $V_{SWH}$  Plane**

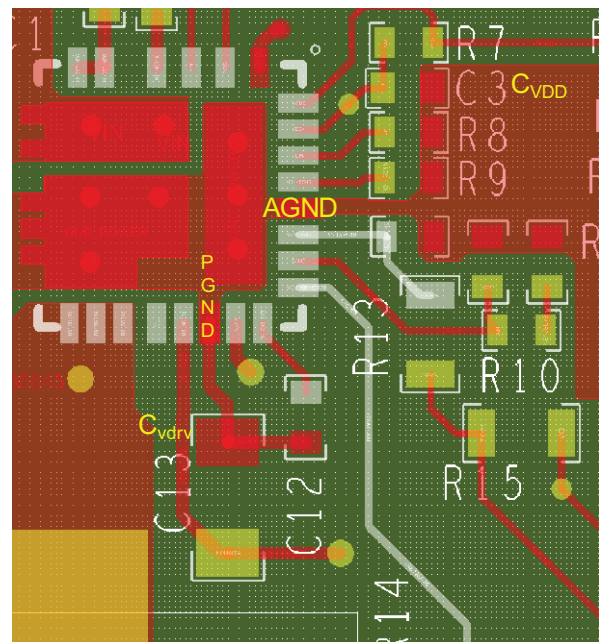**Fig. 30**


1. Connect output inductor to SiC462 with large plane to lower the resistance.
2. If any snubber network is required, place the components on the bottom side as shown above.

**Step 4:  $V_{DD}/V_{DRV}$  Input Filter**

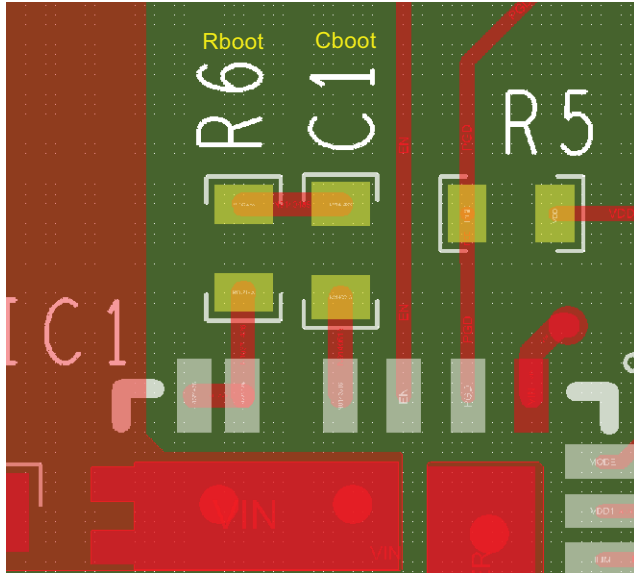**Fig. 31**


1.  $C_{VDD}$  cap should be placed between pin 26 and pin 23 (the  $A_{GND}$  of driver IC) to achieve best noise filtering.
2.  $C_{VDRV}$  cap should be placed close to  $V_{DRV}$  (pin 16) and  $P_{GND}$  (pin 17) to reduce effects of trace impedance and provide maximum instantaneous driver current for low side MOSFET during switching cycle.

**Step 5: BOOT Resistor and Capacitor Placement**

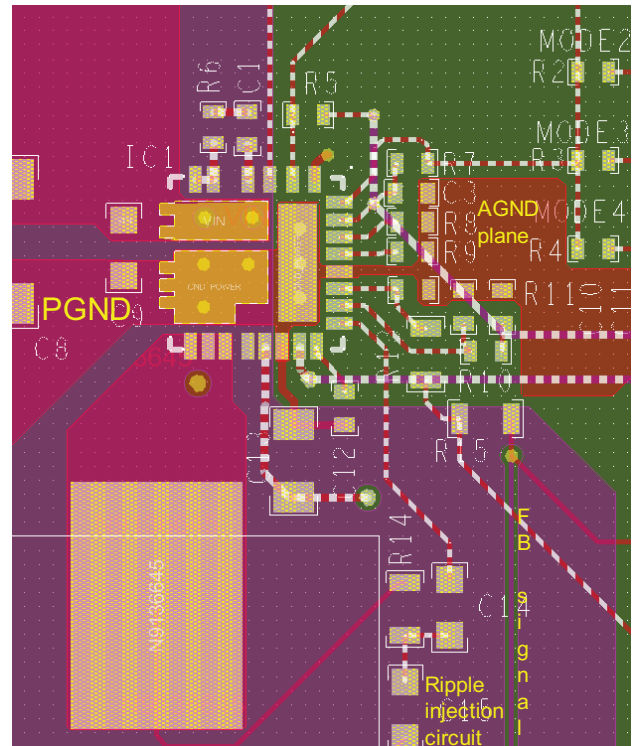**Fig. 32**


1. These components need to be placed very close to SiC462, right between PHASE (pin 5, 6) and BOOT (pin 4).
2. In order to reduce parasitic inductance, it is recommended to use 0402 chip size for the resistor and the capacitor.

**Step 6: Signal Routing**

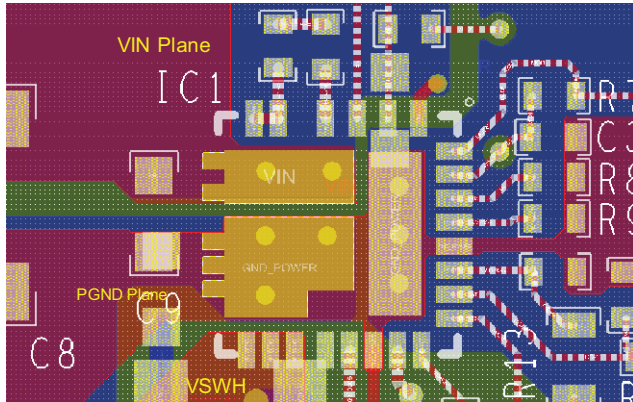**Fig. 33**


1. Separate the small analog signal from high current path. As shown above, the high current paths with high  $dv/dt$ ,  $di/dt$  are placed on the left side of the IC, while the small control signals are placed on the right side of the IC. All the components for small analog signal should be placed closer to IC with minimum trace length.
2. Pin 23 is the IC analog ground, which should have a single connection to power ground. The  $A_{GND}$  ground plane connected with pin 23 helps keep  $A_{GND}$  quiet and improve noise immunity.
3. Feedback signal can be routed through inner layer. Make sure this signal is far away from  $V_{SWH}$  node and shielded by inner ground layer.
4. Ripple injection circuit can be placed next to inductor. Kelvin connection as shown above is recommended.

**Step 7: Adding Thermal Relief Vias and duplicate Power Path Plane**

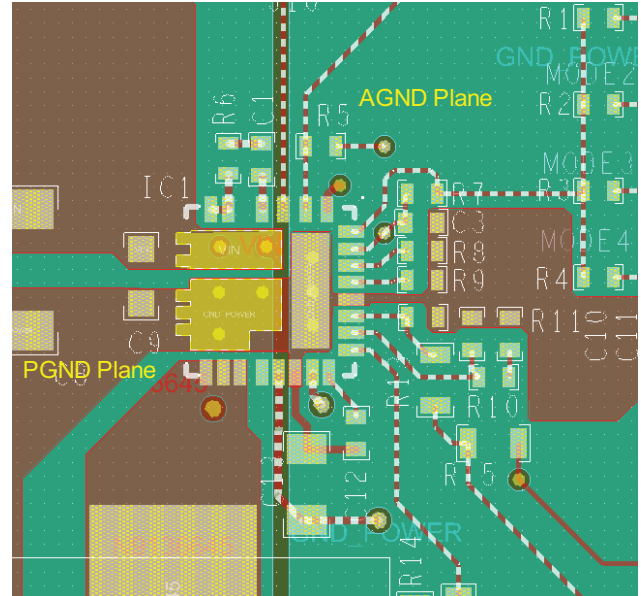**Fig. 34**

1. Thermal relief vias can be added on the  $V_{IN}$  and  $P_{GND}$  pads to utilize inner layers for high-current and thermal dissipation.
2. To achieve better thermal performance, additional vias can be put on  $V_{IN}$  and  $P_{GND}$  plane. Also, it is necessary to duplicate the  $V_{IN}$  and ground planes at bottom layer to maximize the power dissipation capability from PCB.
3.  $V_{SWH}$  pad is a noise source and not recommended to put vias on this pad.
4. 8 mil drill for pads and 10 mils drill for plane are optional via sizes. The vias on pads may drain solder during assembly and cause assembly issues. Please consult with the assembly house for guidelines.

**Step 8: Ground Layer**

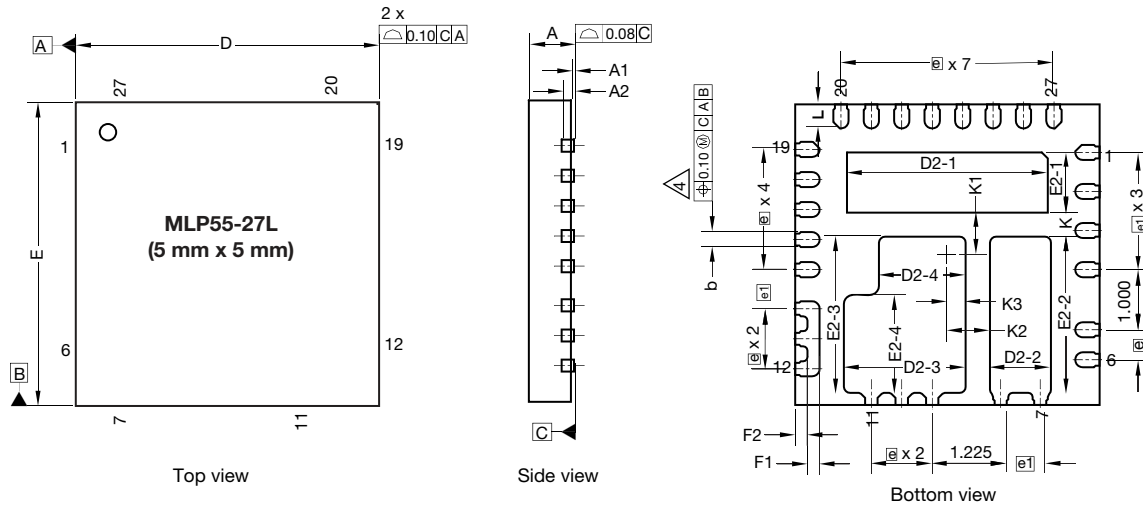**Fig. 35**

1. It is recommended to make the entire inner layer (next to top layer) ground plane.
2. This ground plane provides shielding between noise source on top layer and signal trace within inner layer.
3. The ground plane can be broken into two sections as  $P_{GND}$  and  $A_{GND}$ .

**PACKAGE OUTLINE DRAWING PowerPAK® MLP55-27**


DIM.	MILLIMETERS			INCHES		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A <sup>(8)</sup>	0.70	0.75	0.80	0.027	0.029	0.031
A1	0.00	-	0.05	0.000	-	0.002
A2	0.20 ref.			0.008 ref.		
b <sup>(4)</sup>	0.20	0.25	0.30	0.078	0.098	0.011
D	5.00 BSC			0.196 BSC		
e	0.50 BSC			0.019 BSC		
e1	0.65 BSC			0.0256 BSC		
E	5.00 BSC			0.196 BSC		
L	0.35	0.40	0.45	0.014	0.016	0.018
N <sup>(3)</sup>	28			28		
D2-1	3.25	3.30	3.35	0.128	0.130	0.132
D2-2	0.95	1.00	1.05	0.037	0.039	0.041
D2-3	1.95	2.00	2.05	0.077	0.079	0.081
D2-4	1.37	1.42	1.47	0.054	0.056	0.058
E2-1	0.95	1.00	1.05	0.037	0.039	0.041
E2-2	2.55	2.60	2.65	0.100	0.102	0.104
E2-3	2.55	2.60	2.65	0.100	0.102	0.104
E2-4	1.58	1.63	1.68	0.062	0.064	0.066
F1	0.20	-	0.25	0.008	-	0.010
F2	0.20 min.			0.008 min.		
K	0.40 BSC			0.016 BSC		
K1	0.70 BSC			0.028 BSC		
K2	0.70 BSC			0.028 BSC		
K3	0.30 BSC			0.012 BSC		

**Notes**

- Use millimeters as primary measurement
- Dimensioning and tolerances conform to ASME Y14.5M - 1994
- N is the number of terminals, Nd is the number of terminals in x-direction, and Ne is the number of terminals in y-direction
- Dimension b applies to plated terminal and is measured between 0.20 mm and 0.25 mm from terminal tip
- The pin #1 identifier must be existed on the top surface of the package by using indentation mark or other feature of package body
- Exact shape and size of this feature is optional
- Package warpage max. 0.08 mm
- Applied only for terminals

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see [www.vishay.com/ppg?65124](http://www.vishay.com/ppg?65124).



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[SiC462ED-T1-GE3](#)