


Single phase solid state Relay(SSR-DA)

Order Model

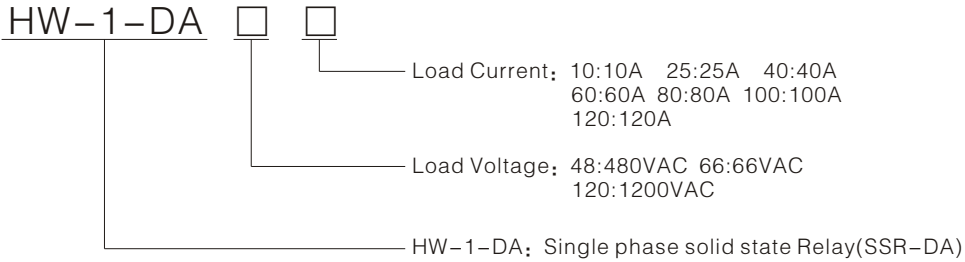

HW-1-DA4840:Single phase solid state Relay(SSR-DA) 40A/480VAC

Technical Specification

Controlling voltage	3-32VDC
Controlling current	6-35mA
Make-on voltage	3.5VDC
Break-off Voltage	1.5VDC
Reverse Voltage	32VDC
Load Voltage	480V/660V/1200V
Load Current	10,25,40,60,80,100,120A
Instant Voltage	900VAC
On-state Voltage Drop	<1.5V
On-off Time	≤ 10mS
Off-state Leakage Curent	≤ 10mA
Dielectric Strength	≥ 2500VAC
Insulation Resistance	500MΩ 500VDC
Ambient Temperature	-30~80°C
Indicate Methods	LED

Mounting and Dimension

