



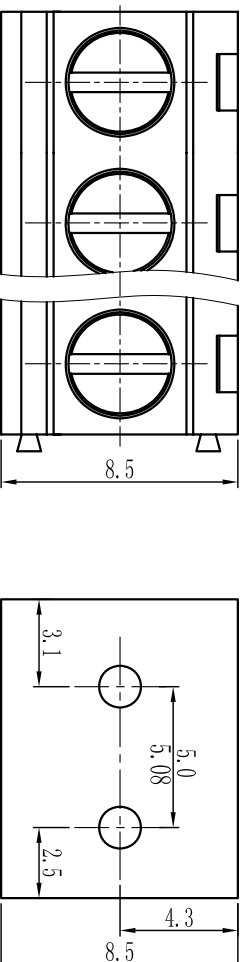

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

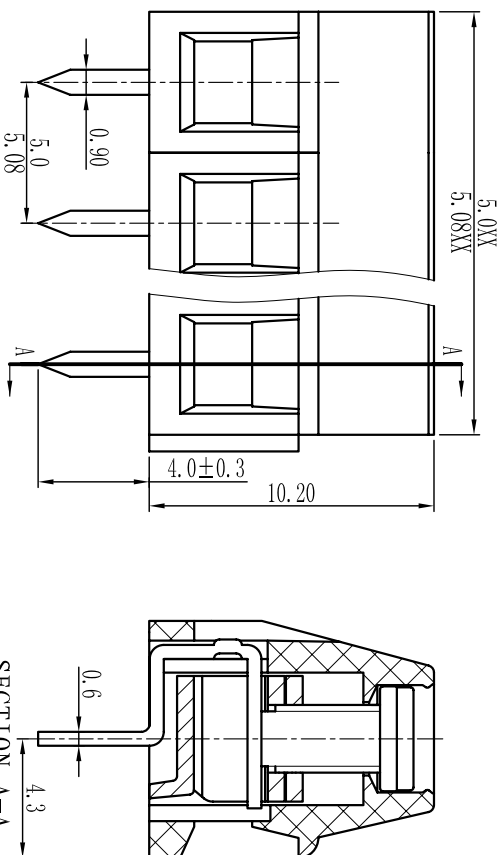

电气性能/Electrical
参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 250V
额定电流/Rated current: 8A 15A
接触电阻/Contact resistance: 20m Ω
使用线径/Wire range: 26-16AWG 1.5mm²
耐电压/Withstanding voltage: AC2000V/1Min
绝缘电阻/Insulation resistance: 500M Ω /DC500V
机械性能/Mechanical

温度范围/Temp Range: -40 $^{\circ}$ C $^{+}$ 105 $^{\circ}$ C
扭矩/Torque: 0.4Nm (3.5lb`in)
剥线长度/Strip length: 6-7mm

尺寸/Dimensions

间距/Pitch: 5.0mm;5.08mm
极数/Poles: 2P-24P
材质及电镀/Material
塑件/Housings: PA66, UL94V-0
螺丝/Screws: M2.5, steel Zinc plated
方块/Cage: Brass, Ni plated
焊脚/Pin header: Brass, Snle plated

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid					
variable range	6 over to 30	30 over to 120	120 over to 480	480 over to all	all to 6	6 over to 10	10 over to 50	50 over to 120	120 over to all
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1 $^{\circ}$ 30' 20' 10'
									0.5 0.025 0.06 0.12 0.4

订购方式: HOW TO ORDER

- - P - - - -

型号/Model: 极数/POLE:

未定义 No definition
 焊脚间距/Sing pitch:
 间距/Double pitch:

客户需求 Customer Request:

灰色/Gray	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE 比例

第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ127-XP-1Y-00A