


AS21P2TLR

Datasheet - production data

Low voltage 0.5 Ω max dual single-pole double-throw analog switch with break-before-make

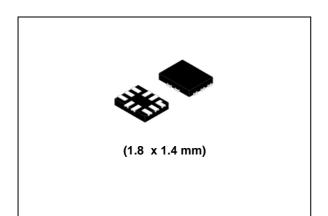

Features

- Ultra low power dissipation: I_{CC} = 0.2 μA (max.) at T_A = 85 °C
- Low ON resistance V_{IN} = 0 V:
 - R_{ON} = 0.50 Ω (max. T_A = 25 °C) at V_{CC} = 4.3 V
 - R_{ON} = 0.50 Ω (max. T_A = 25 °C) at V_{CC} = 3.6 V
- Wide operating voltage range:
 V_{CC} (OPR) = 1.65 to 4.3 V single supply
- 4.3 V tolerant and 1.8 V compatible threshold on digital control input at V_{CC} = 2.3 to 4.3 V
- Latch-up performance exceeds 300 mA (JESD 17)
- ESD performance: HMB > 2 kV (MIL STD 883 method 3015)

Description

The AS21P2TLR is a high-speed CMOS singlepole double-throw (SPDT) analog switch or dual 2:1 multiplexer/demultiplexer bus switch fabricated using silicon gate C²MOS technology. Designed to operate from 1.65 to 4.3 V, this device is ideal for portable applications.

It offers very low ON resistance ($R_{ON} < 0.5 \Omega$) at V_{CC} = 3.6 V. The nIN inputs are provided to control the independent channel switches nS1 and nS2. The switches nS1 are ON (connected to common ports Dn) when the nIN input is held high and OFF (state of high impedance exists between the two ports) when nIN is held low. The switches nS2 are ON (connected to common ports Dn) when the nIN input is held low and OFF (state of high impedance exists between the two ports) when IN is held high. Additional key features are fast switching speed, break-before-make delay time and ultralow power consumption. All inputs and outputs are equipped with protection circuits against static discharge, giving them ESD and excess transient voltage immunity.

| | | 5 | |
|---|------------|-----------------------|---------------|
| | Order code | Package | Packing |
| ĺ | AS21P2TLRQ | QFN10L (1.8 x 1.4 mm) | Tape and reel |

Table 1. Device summary

DocID026024 Rev 1

This is information on a product in full production.

Contents

| 1 | Pin settings 3 |
|---|--|
| | 1.1 Pin connection |
| | 1.2 Pin description 4 |
| 2 | Input equivalent circuit and truth table |
| 3 | Maximum rating |
| 4 | Electrical characteristics |
| 5 | Test circuit |
| 6 | Package mechanical data 16 |
| 7 | Revision history |



1 Pin settings

1.1 Pin connection

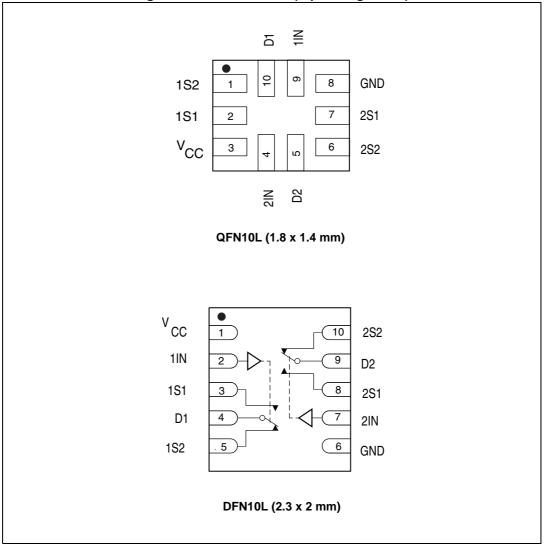


Figure 1. Pin connection (top through view)



1.2 Pin description

| Pin number | Symbol | Name and function |
|------------|-----------------|-------------------------|
| 1 | 1S2 | Independent channel |
| 2 | 1S1 | Independent channel |
| 3 | V _{CC} | Positive voltage supply |
| 4 | 2IN | Control |
| 5 | D2 | Common channel |
| 6 | 282 | Independent channel |
| 7 | 2S1 | Independent channel |
| 8 | GND | Ground (0 V) |
| 9 | 1IN | Control |
| 10 | D1 | Common channel |

| Table | 2. | Pin | description |
|-------|------------|-----|-------------|
| Table | _ . | | acouption |

Note:

Exposed pad must be soldered to a floating plane. Do NOT connect to power or ground.



2 Input equivalent circuit and truth table

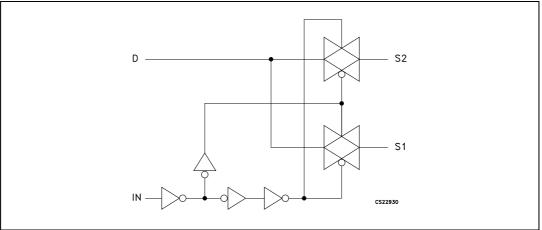


Figure 2. Input equivalent circuit

Table 3. Truth table

| IN | Switch S1 | Switch S2 |
|----|--------------------|--------------------|
| Н | ON | OFF ⁽¹⁾ |
| L | OFF ⁽¹⁾ | ON |

1. High impedance.



3 Maximum rating

Stressing the device above the rating listed in the "Absolute maximum ratings" table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality documents.

| Symbol | Parameter | Value | Unit |
|--|--|-------------------------------|------|
| V _{CC} | Supply voltage | -0.5 to 5.5 | V |
| VI | DC input voltage | -0.5 to V _{CC} + 0.5 | V |
| V _{IC} | DC control input voltage | -0.5 to 5.5 | V |
| Vo | DC output voltage | -0.5 to V _{CC} + 0.5 | V |
| I _{IKC} | DC input diode current on control pin ($V_{IN} < 0 V$) | -50 | mA |
| I _{IK} | DC Input diode current (V _{IN} < 0 V) | ±50 | mA |
| I _{ОК} | DC output diode current | ±20 | mA |
| Ι _Ο | DC output current | ±300 | mA |
| I _{OP} | DC output current peak (pulse at 1 ms, 10% duty cycle) | ±500 | mA |
| l _{CC} or I _{GND} | DC V _{CC} or ground current | ±100 | mA |
| PD | Power dissipation at T _A = 70 °C | 1120 | mW |
| T _{STG} | Storage temperature | -65 to 150 | °C |
| TL | Lead temperature (10 sec) | 300 | °C |

| Table 4. Absolute maximum ratings |
|-----------------------------------|
|-----------------------------------|

Table 5. Recommended operating conditions

| Symbol | Paramete | Value | Unit | |
|-----------------|----------------------------------|--------------------------------|-----------|--------|
| V _{CC} | Supply voltage | 1.65 to 4.3 | V | |
| VI | Input voltage | 0 to V _{CC} | V | |
| V _{IC} | Control input voltage | 0 to 4.3 | V | |
| Vo | Output voltage | 0 to V _{CC} | V | |
| T _{op} | Operating temperature | | -40 to 85 | °C |
| dt/dv | Input rise and fall time control | $V_{\rm CC}$ = 1.65 to 2.7 V | 0 to 20 | ns/V |
| uluv | input | V _{CC} = 3.0 to 4.3 V | 0 to 10 | 115/ V |

4 Electrical characteristics

| | | | | | | Value | | | |
|-------------------|--|---------------------|--|------------------------|------|-------|----------------------|------|------|
| Symbol | Parameter | V _{CC} (V) | Test condition | T _A = 25 °C | | | -40 to 85 °C | | Unit |
| | | | | Min | Тур | Max | Min | Max | |
| | | 1.65 – 1.95 | | 0.65 V _{CC} | | | 0.65 V _{CC} | | |
| | | 2.3 – 2.5 | | 1.2 | | | 1.2 | | |
| V _{IH} | High level input voltage | 2.7 – 3.0 | | 1.3 | | | 1.3 | | V |
| | | 3.0 - 3.6 | | 1.4 | | | 1.4 | | |
| | | 4.3 | | 1.5 | | | 1.5 | | |
| | | 1.65 – 1.95 | | | | 0.25 | | 0.25 | |
| | | 2.3 – 2.5 | | | | 0.25 | | 0.25 | |
| V _{IL} | Low level input voltage | 2.7 - 3.0 | | | | 0.25 | | 0.25 | V |
| | | 3.0 - 3.6 | | | | 0.30 | | 0.30 | |
| | | 4.3 | | | | 0.40 | | 0.40 | |
| | Switch ON resistance | 4.3 | V _S = 0 V to V _{CC} I _S = 100 mA | | 0.45 | 0.50 | | 0.60 | Ω |
| | | 3.6 | | | 0.45 | 0.50 | | 0.60 | |
| R _{ON} | | 3.0 | | | 0.50 | 0.55 | | 0.60 | |
| | | 2.3 | | | 0.60 | 0.70 | | 0.80 | |
| | | 1.8 | | | 0.80 | 0.9 | | 1.0 | |
| ΔR_{ON} | ON resistance match between channels ⁽¹⁾ , ⁽²⁾ | 2.7 | V _S = 1.5 V I _S = 100 mA | | 0.1 | | | | Ω |
| | ON resistance | 4.3 | - | | 0.15 | 0.20 | | 0.20 | |
| | | 3.6 | | | 0.15 | 0.20 | | 0.20 | |
| Б | | 3.0 | V _S = 1.5 V | | 0.15 | 0.20 | | 0.20 | Ω |
| R _{FLAT} | flatness ⁽³⁾ | 2.7 | I _S = 100 mA | | 0.15 | 0.20 | | 0.20 | |
| | | 2.3 | | | 0.20 | 0.25 | | 0.25 | |
| | | 1.65 | | | 0.35 | 0.45 | | 0.45 | |
| I _{OFF} | OFF state leakage current (nSn), (Dn) | 4.3 | V _S = 0.3 or 4 V | | | ±20 | | ±100 | nA |
| I _{IN} | Input leakage current | 0-4.3 | V _{IN} = 0 to 4.3 V | | | ±0.05 | | ±1 | μA |
| I _{CC} | Quiescent supply current ⁽¹⁾ | 1.65 – 4.3 | $V_{IN} = V_{CC}$ or GND | | | ±0.05 | | ±0.2 | μA |



| | Parameter | V _{CC} (V) | Test condition | Value | | | | | |
|-------------------|--|---------------------|--|------------------------|-----|-----|--------------|------|------|
| Symbol | | | | T _A = 25 °C | | | -40 to 85 °C | | Unit |
| | | | | Min | Тур | Max | Min | Max | |
| | Quiescent supply current low voltage driving | 4.3 | V _{1IN,} V _{2IN} = 1.65 V | | ±37 | ±50 | | ±100 | |
| I _{CCLV} | | | V _{1IN,} V _{2IN} = 1.80 V | | ±33 | ±40 | | ±50 | μA |
| | | | V _{1IN,} V _{2IN} = 2.60 V | | ±12 | ±20 | | ±30 | |

Table 6. DC specifications (continued)

1. Guaranteed by design.

2. $\Delta R_{ON} = R_{ON(max)} - R_{ON(min)}$.

3. Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal ranges.

| | Parameter | | | Value | | | | | |
|-------------------|---------------------------------|---------------------|-------------------------------------|------------------------|------|-----|--------------|-----|------|
| Symbol | | V _{CC} (V) | Test condition | T _A = 25 °C | | | -40 to 85 °C | | Unit |
| | | | | Min | Тур | Max | Min | Max | |
| | | 1.65 – 1.95 | | | 0.45 | | | | |
| t _{PLH,} | Propagation delay | 2.3 - 2.7 | | | 0.40 | | | | ns |
| t _{PHL} | | 3.0 - 3.3 | | | 0.30 | | | | |
| | | 3.6 - 4.3 | | | 0.30 | | | | |
| | Turn-ON time | 1.65 – 1.95 | V _S = 0.8 V | | 120 | | | | |
| t _{ON} | | 2.3 - 2.7 | V _S = 1.5 V | | 65 | 85 | | 90 | ns |
| - | | 3.0 - 3.3 | | | 42 | 55 | | 65 | |
| | | 3.6 - 4.3 | | | 40 | 55 | | 65 | |
| | Turn-OFF time | 1.65 – 1.95 | V _S = 0.8 V | | 45 | | | | |
| t _{OFF} | | 2.3 – 2.7 | V _S = 1.5 V | | 18 | 30 | | 40 | ns |
| | | 3.0 - 3.3 | | | 16 | 30 | | 40 | |
| | | 3.6 - 4.3 | | | 15 | 30 | | 40 | |
| | | 1.65 – 1.95 | - C _L = 35 pF | 2 | 80 | | | | |
| t _D | Break-before make time delay | 2.3 – 2.7 | R _L = 50 Ω | 2 | 60 | | | | ns |
| | uciay | 3.0 - 3.3 | V _S ⁻ = 1.5 V | 2 | 55 | | | | |
| | | 3.6 - 4.3 | | 2 | 50 | | | | |

Table 7. AC electrical characteristics (CL = 35 pF, RL = 50 Ω, t_{r} = t_{f} $\leq\,$ 6 ns)



| Symbol | | | | | | Value | | | - |
|--------|------------------|---------------------|---|------------------------|-----|--------------|-----|------|---|
| | Parameter | V _{CC} (V) | Test condition | T _A = 25 °C | | -40 to 85 °C | | Unit | |
| | | | | Min | Тур | Max | Min | Max | |
| Q | | 1.65 – 1.95 | C _L = 100 pF | | 43 | | | | _ |
| | Charge injection | 2.3 – 2.7 | R _L = 1 ΜΩ V _{GEN} = 0 V R _{GEN} = 0 Ω | | 51 | | | | |
| | | 3.0 - 3.3 | | | 51 | | | | |
| | | 3.6 - 4.3 | GLIN | | 49 | | | | |

Table 7. AC electrical characteristics (C_L = 35 pF, R_L = 50 Ω , t_r = t_f \leq 6 ns) (continued)

Table 8. Analog switch characteristics (C_L = 5 pF, R_L = 50 Ω , T_A = 25 °C)

| | | | | | | Value | | | | |
|-----------------|--|---------------------|---|------------------------|------|-------|--------------|-----|------|--|
| Symbol | Parameter | V _{CC} (V) | Test condition | T _A = 25 °C | | | -40 to 85 °C | | Unit | |
| | | | | Min | Тур | Max | Min | Max | | |
| OIRR | Off isolation ⁽¹⁾ | 1.65 – 4.3 | V _S = 1 V _{RMS} f = 100 kHz | | -66 | | | | dB | |
| Xtalk | Crosstalk | 1.65 – 4.3 | V _S = 1 V _{RMS} f = 100 kHz | | -72 | | | | dB | |
| THD | Total harmonic distortion | 2.3 - 4.3 | $R_{L} = 600 \Omega$ $V_{IN} = 2V_{PP}$ $f = 20 Hz to$ $20 kHz$ | | 0.02 | | | | % | |
| BW | -3 dB bandwidth | 1.65 – 4.3 | R _L = 50 Ω | | 55 | | | | MHz | |
| C _{IN} | Control pin input capacitance | | | | 5 | | | | | |
| C _{Sn} | Sn port capacitance | 3.3 | f = 1 MHz | | 40 | | | | pF | |
| CD | D port capacitance when switch is enabled | 3.3 | f = 1 MHz | | 114 | | | | | |

1. Off Isolation = 20 Log_{10} (V_D/V_S), V_D = output. V_S = input at off switch.



5 **Test circuit**


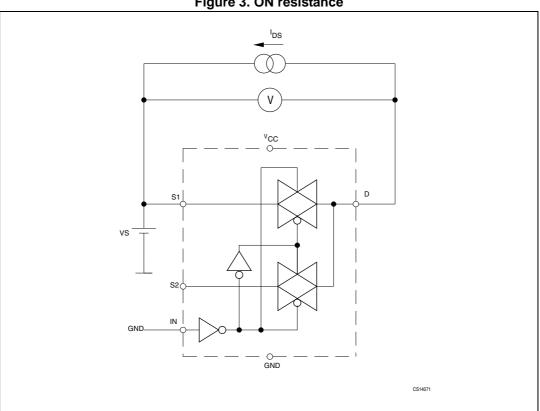


Figure 3. ON resistance

Figure 4. OFF leakage

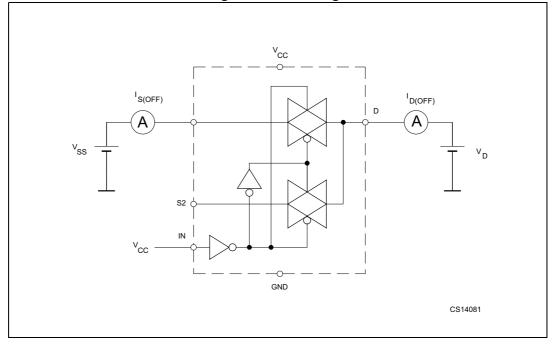

DocID026024 Rev 1



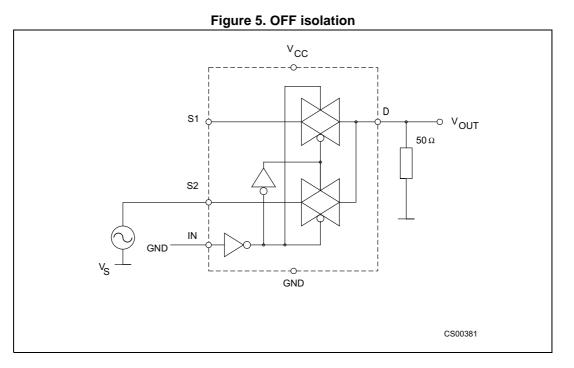
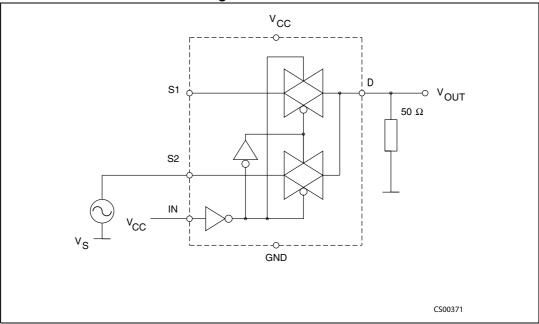


Figure 6. Bandwidth






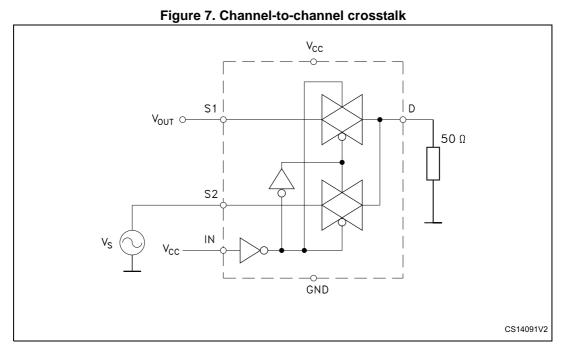


Figure 8. Test circuit

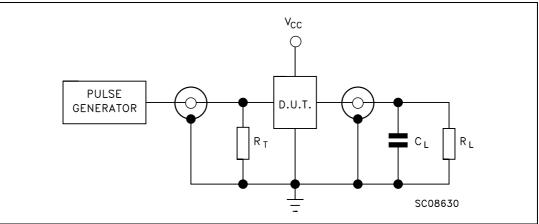

1. C_L = 5/35 pF or equivalent (includes jig and probe capacitance). R_L = 50 Ω or equivalent. R_T = Z_{OUT} of pulse generator (typically 50 Ω).



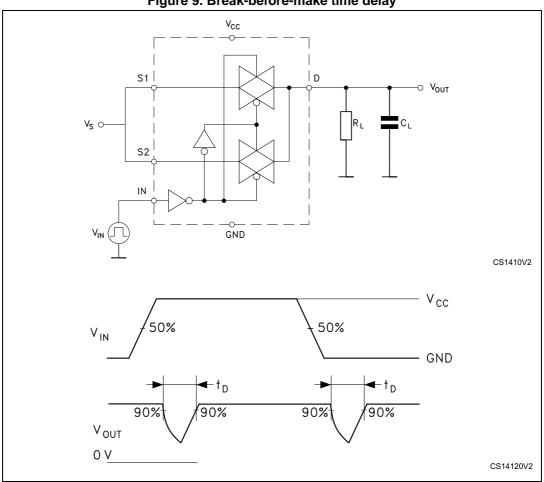


Figure 9. Break-before-make time delay



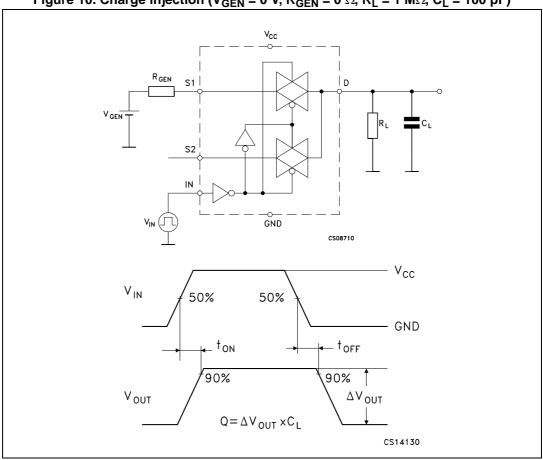


Figure 10. Charge injection (V_{GEN} = 0 V, R_{GEN} = 0 Ω , R_L = 1 M Ω , CL = 100 pF)




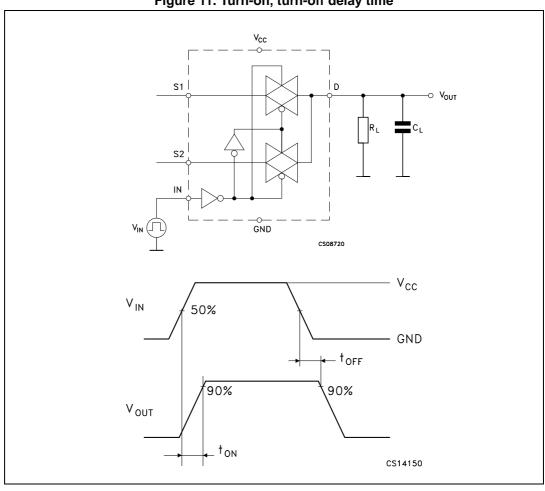



Figure 11. Turn-on, turn-off delay time



6 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

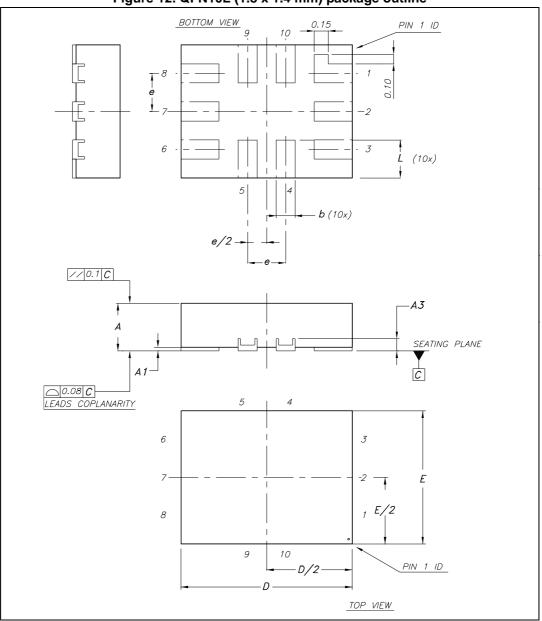






| 0 | millimeters | | | inches | | | |
|--------|-------------|------|------|--------|-------|-------|--|
| Symbol | Nom | Min | Max | Nom | Min | Max | |
| А | 0.50 | 0.45 | 0.55 | 0.020 | 0.017 | 0.021 | |
| A1 | 0.02 | 0 | 0.05 | 0.001 | 0 | 0.002 | |
| A3 | 0.127 | | | 0.005 | 0 | 0 | |
| b | 0.20 | 0.15 | 0.25 | 0.007 | 0.006 | 0.010 | |
| D | 1.80 | 1.70 | 1.90 | 0.070 | 0.066 | 0.074 | |
| Е | 1.40 | 1.30 | 1.50 | 0.055 | 0.051 | 0.059 | |
| е | 0.40 | | | 0.015 | | | |
| L | 0.40 | 0.30 | 0.50 | 0.015 | 0.011 | 0.020 | |

Table 9. QFN10L (1.8 x 1.4 mm) mechanical data

Figure 13. QFN10L (1.8 x 1.4 mm) footprint recommendations

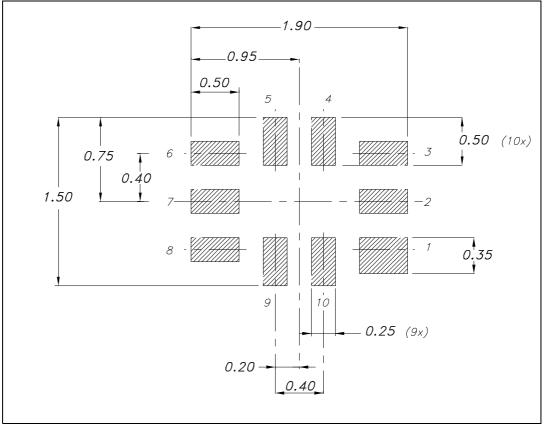

^{1.} Drawing not to scale.



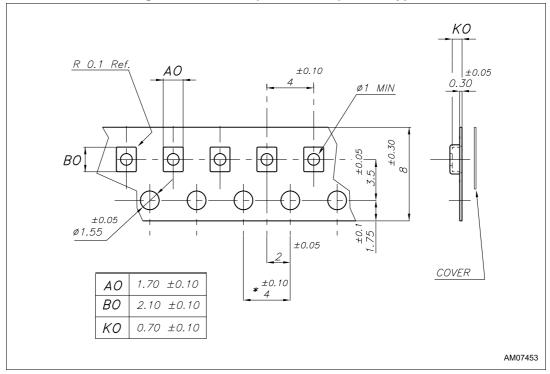


Figure 14. QFN10L (1.8 x 1.4 mm) carrier type




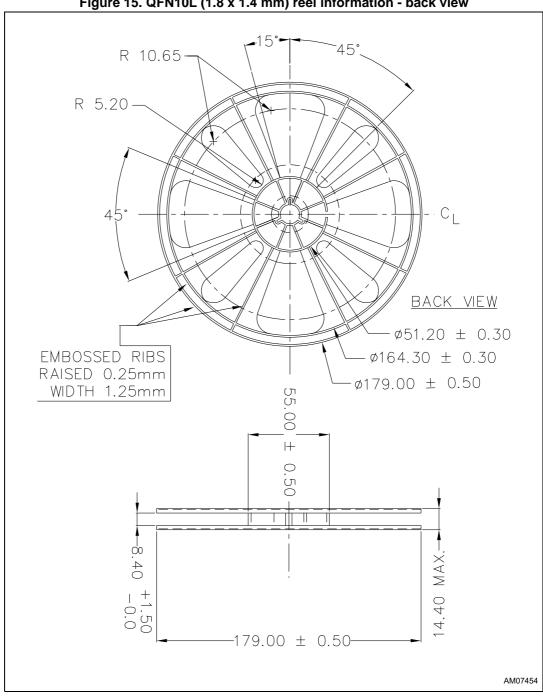


Figure 15. QFN10L (1.8 x 1.4 mm) reel information - back view





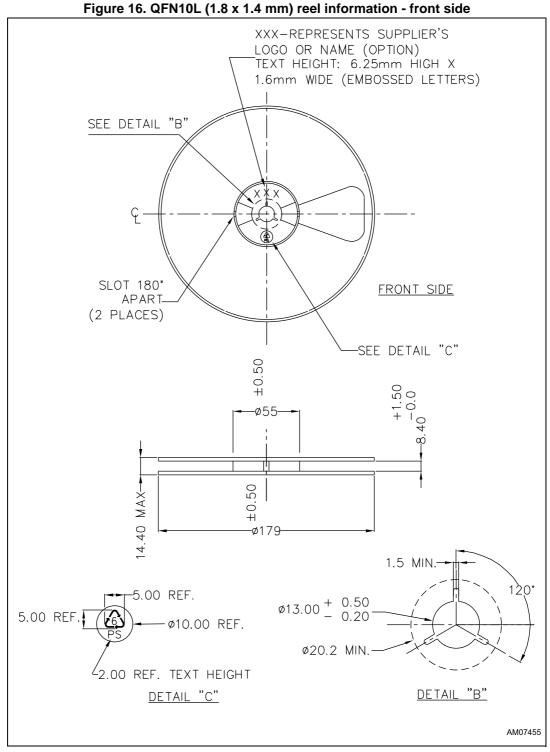

7 Revision history

| Table 10. Document | revision | history |
|--------------------|----------|---------|
|--------------------|----------|---------|

| Date | Revision | Changes |
|-------------|----------|------------------|
| 07-Mar-2014 | 1 | Initial release. |



Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries. Information in this document supersedes and replaces all information previously supplied. The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

DocID026024 Rev 1



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics: AS21P2TLRQ