## STW40N95K5



# N-channel 950 V, 0.110 Ω typ., 38 A MDmesh™ K5 Power MOSFET in a TO-247 package

Datasheet - production data





Figure 1: Internal schematic diagram



#### **Features**

Order code	V <sub>DS</sub>	R <sub>DS(on)</sub> max	ΙD	Ртот
STW40N95K5	950 V	0.130 Ω	38 A	450 W

- Industry's lowest R<sub>DS(on)</sub> x area
- Industry's best figure of merit (FoM)
- Ultra low gate charge
- 100% avalanche tested
- Zener-protected

### **Applications**

• Switching applications

### **Description**

This very high voltage N-channel Power MOSFET is designed using MDmesh™ K5 technology based on an innovative proprietary vertical structure. The result is a dramatic reduction in on-resistance and ultra-low gate charge for applications requiring superior power density and high efficiency.

**Table 1: Device summary** 

Order code	Marking	Package	Packaging
STW40N95K5	40N95K5	TO-247	Tube

Contents STW40N95K5

## **Contents**

1	Electric	al ratings	3
2	Electric	cal characteristics	4
	2.1	Electrical characteristics (curves)	6
3	Test cir	cuits	9
4	Packag	e mechanical data	10
	4.1	TO-247 package information	10
5	Revisio	n history	12

STW40N95K5 Electrical ratings

# 1 Electrical ratings

Table 2: Absolute maximum ratings

Symbol	Parameter	Value	Unit
V <sub>GS</sub>	Gate- source voltage	± 30	V
I <sub>D</sub>	Drain current (continuous) at T <sub>C</sub> = 25 °C	38	Α
I <sub>D</sub>	Drain current (continuous) at T <sub>C</sub> = 100 °C	24	Α
I <sub>DM</sub> <sup>(1)</sup>	Drain current (pulsed)	152	Α
Ртот	Total dissipation at T <sub>C</sub> = 25 °C		W
I <sub>AR</sub>	Max current during repetitive or single pulse avalanche	13	Α
Eas	Single pulse avalanche energy (starting T <sub>J</sub> = 25 °C, I <sub>D</sub> = 13 A, V <sub>DD</sub> = 50 V)		mJ
dv/dt (2)	Peak diode recovery voltage slope	4.5	V/ns
dv/dt (3)	MOSFET dv/dt ruggedness		V/ns
T <sub>j</sub> T <sub>stg</sub>	Operating junction temperature Storage temperature	-55 to 150	°C

#### Notes:

Table 3: Thermal data

Symbol	Parameter	Value	Unit
R <sub>thj-case</sub>	Thermal resistance junction-case max	0.28	°C/W
R <sub>thj-amb</sub>	R <sub>thj-amb</sub> Thermal resistance junction-amb max		°C/W

<sup>&</sup>lt;sup>(1)</sup>Pulse width limited by safe operating area.

 $<sup>^{(2)}</sup>I_{SD} \leq$  19 A, di/dt  $\leq$  100 A/ $\mu$ s, VDS(peak)  $\leq$  V(BR)DSS.

 $<sup>^{(3)}</sup>V_{DS} \le 760 \text{ V}$ 

Electrical characteristics STW40N95K5

### 2 Electrical characteristics

(T<sub>case</sub> =25 °C unless otherwise specified)

Table 4: On /off states

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
V <sub>(BR)DSS</sub>	Drain-source breakdown voltage	V <sub>GS</sub> = 0, I <sub>D</sub> = 1 mA	950			٧
	Zara gata valtaga drain	V <sub>GS</sub> = 0, V <sub>DS</sub> = 950 V			1	μΑ
IDSS	Zero gate voltage drain current	V <sub>GS</sub> = 0, V <sub>DS</sub> = 950 V, T <sub>C</sub> =125 °C			50	μΑ
Igss	Gate-body leakage current	$V_{DS}=0, V_{GS}=\pm 20 \text{ V}$			±10	μΑ
V <sub>GS(th)</sub>	Gate threshold voltage	$V_{DS} = V_{GS}$ , $I_D = 100 \mu A$	3	4	5	V
R <sub>DS(on)</sub>	Static drain-source on- resistance	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 19 A		0.110	0.130	Ω

Table 5: Dynamic

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
Ciss	Input capacitance		-	3300	•	pF
Coss	Output capacitance	V <sub>GS</sub> =0, V <sub>DS</sub> =100 V, f=1 MHz	-	250	ı	pF
Crss	Reverse transfer capacitance	V33-0, V53-100 V, 1-1 WHZ	-	2	ı	pF
C <sub>o(tr)</sub> (1)	Equivalent capacitance time related	$V_{GS} = 0$ , $V_{DS} = 0$ to 760 V	-	398	ı	pF
C <sub>o(er)</sub> <sup>(2)</sup>	Equivalent capacitance energy related	V <sub>GS</sub> = 0, V <sub>DS</sub> = 0 to 760 V	-	142	1	pF
R <sub>G</sub>	Intrinsic gate resistance	f = 1 MHz, I <sub>D</sub> =0	-	5	ı	Ω
$Q_g$	Total gate charge	$V_{DD} = 760 \text{ V}, I_D = 38 \text{ A}$	-	93	-	nC
Q <sub>gs</sub>	Gate-source charge	V <sub>GS</sub> =10 V	-	18.7	-	nC
Q <sub>gd</sub>	Gate-drain charge	(see Figure 16: "Gate charge test circuit")	-	63.4	ı	nC

#### Notes

4/13

Table 6: Switching times

Symbol	Parameter	Test conditions	Min.	Тур.	Max	Unit
t <sub>d(on)</sub>	Turn-on delay time	V <sub>DD</sub> = 475 V, I <sub>D</sub> = 19 A,	-	33.5	-	ns
tr	Rise time	$R_G = 4.7 \Omega$ , $V_{GS} = 10 V$	ı	51	ı	ns
t <sub>d(off)</sub>	Turn-off-delay time	(see Figure 15: "Switching times test circuit for resistive load")	- 1	91.5	ı	ns
t <sub>f</sub>	Fall time		-	10	-	ns

 $<sup>^{(1)}</sup>$ Time related is defined as a constant equivalent capacitance giving the same charging time as  $C_{oss}$  when  $V_{DS}$  increases from 0 to 80%  $V_{DSS}$ 

 $<sup>^{(2)}</sup>$ energy related is defined as a constant equivalent capacitance giving the same stored energy as  $C_{oss}$  when  $V_{DS}$  increases from 0 to 80%  $V_{DSS}$ 

Table 7: Source drain diode

Symbol	Parameter	Test conditions	Min.	Тур.	Max	Unit
I <sub>SD</sub>	Source-drain current		-		38	Α
I <sub>SDM</sub> <sup>(1)</sup>	Source-drain current (pulsed)		1		152	Α
V <sub>SD</sub> (2)	Forward on voltage	I <sub>SD</sub> = 38 A, V <sub>GS</sub> = 0	-		1.5	V
t <sub>rr</sub>	Reverse recovery time	I <sub>SD</sub> = 38 A, di/dt = 100 A/µs	-	706		ns
Qrr	Reverse recovery charge	V <sub>DD</sub> = 60 V (see Figure 18: " Unclamped inductive load test circuit")	-	22		μC
I <sub>RRM</sub>	Reverse recovery current		-	62		Α
t <sub>rr</sub>	Reverse recovery time	I <sub>SD</sub> = 38 A, di/dt = 100 A/µs V <sub>DD</sub> = 60 V T <sub>J</sub> = 150 °C (see <i>Figure 18: " Unclamped</i>	-	886		ns
Qrr	Reverse recovery charge		-	28.2		μC
I <sub>RRM</sub>	Reverse recovery current	inductive load test circuit")		64		А

#### Notes:

**Table 8: Gate-source Zener diode** 


Symbol	Parameter	Test conditions	Min	Тур.	Max.	Unit
$V_{(BR)GSO}$	Gate-source breakdown voltage	$I_{GS} = \pm 1 \text{mA}, I_{D}=0$	30	-	1	V


The built-in back-to-back Zener diodes have specifically been designed to enhance the device's ESD capability. In this respect the Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.


<sup>&</sup>lt;sup>(1)</sup>Pulse width limited by safe operating area.


 $<sup>^{(2)}</sup>$ Pulsed: pulse duration = 300  $\mu$ s, duty cycle 1.5%


# 2.1 Electrical characteristics (curves)






















Figure 9: Normalized gate threshold voltage vs temperature GIPD121120141035FSR VGS(th) (norm) ID = 100 μA 1.2 1.0 0.8 0.6 0.4 0.2 -50 0 50 100 Tj(°C)










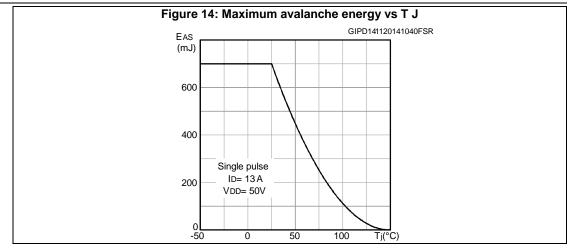

STW40N95K5 Test circuits

### 3 Test circuits








Figure 18: Unclamped inductive load test circuit

VD 0 2200 3.3 JF VDD

ND D.U.T.

AM01471v1





## 4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: **www.st.com**. ECOPACK® is an ST trademark.

## 4.1 TO-247 package information

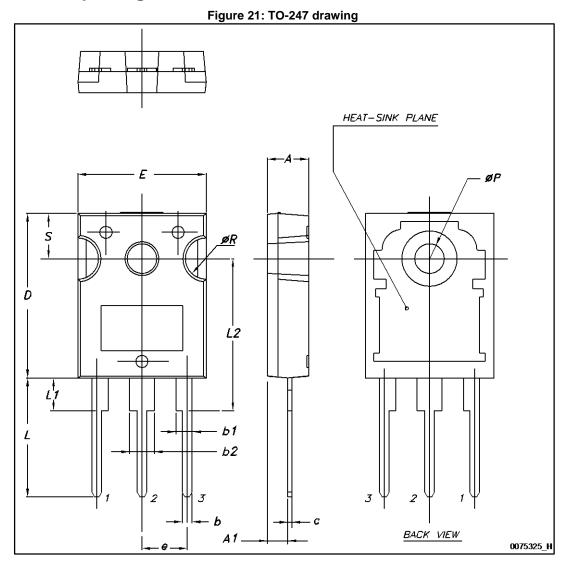


Table 9: TO-247 mechanical data

Dim	mm.				
Dim.	Min.	Тур.	Max.		
А	4.85		5.15		
A1	2.20		2.60		
b	1.0		1.40		
b1	2.0		2.40		
b2	3.0		3.40		
С	0.40		0.80		
D	19.85		20.15		
Е	15.45		15.75		
е	5.30	5.45	5.60		
L	14.20		14.80		
L1	3.70		4.30		
L2		18.50			
ØP	3.55		3.65		
ØR	4.50		5.50		
S	5.30	5.50	5.70		



Revision history STW40N95K5

## 5 Revision history

**Table 10: Document revision history** 

Date	Revision	Changes	
03-Jun-2014	1	First release.	
14-Nov-2014	2	Document status promoted from preliminary to production data.  Added Section 2.1: "Electrical characteristics (curves)".	

#### **IMPORTANT NOTICE - PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2014 STMicroelectronics - All rights reserved

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics: STW40N95K5